




Programmable DC Power Supplies

Product Catalog Version 3.3



Higher Quality Power Processing





About Magna-Power Electronics

Magna-Power Electronics Inc., founded in 1981, applied its strength in engineering to create DC power processing products using modular building blocks. The building blocks were made interchangeable so that systems could be configured per customer requirements at time of order. Investment in inventory and tailoring production for system level manufacturing have made Magna-Power Electronics a leader in providing high-power, cost competitive DC power supplies.

With decades of experience, Magna-Power Electronics has honed its product line to provide robust current-fed power conversion along with user friendly sophisticated microprocessor control. Magna-Power Electronics products can be found around the world processing power for national labs, industrial sites, and universities. The company's products have evolved by listening to customers and working with them to find solutions to their problems. Magna-Power Electronics continual growth is based upon its innovative engineering, superior manufacturing methods, and dedicated employees. Today, all engineering and manufacturing is performed in Flemington, NJ USA. The company designed and owned vertically integrated 73,500 ft² manufacturing facility houses the company's entire operations, including:

- Research and development
- Transformer and inductor winding
- Full sheet metal operations
- Powder coating
- Surface-mount technology (SMT) board assemblies
- Printed circuit board assemblies
- Heat-sink fabrication
- Magnetic core manufacturing
- Assembly and testing

Table of Contents

Introduction	
▶ About Magna-Power Electronics	2
▶ Table of Contents, Product Selector	3
▶ Technology and Feature Overview	4
Key Product Lines	
▶ SL Series: 1.5 kW to 6 kW	6
▶ XR Series: 2 kW to 10 kW	10
▶ TS Series: 5 kW to 45 kW	14
▶ MS Series: 30 kW to 75 kW	18
▶ MT Series: 100 kW to 2000 kW+	22
▶ TS/MS/MT Series Front Panel Types	26
▶ Low Voltage, High Current Models	27
Additional Product Options and Features	
▶ Photovoltaic Power Profile Emulation Software	28
▶ Options	30
▶ Harmonic Neutralizer	33

Product Selector

	<p>Product Name: SL Series</p> <p>Power Levels: 1.5 kW, 2.6 kW, 4 kW, 6 kW</p> <p>Voltage Range: Models from 0-5 Vdc to 0-1000 Vdc</p> <p>Current Range: Models from 0-1.5 Adc to 0-250 Adc</p> <p>Enclosure: Rack-mount, 1U</p>	<p>Page</p> <p>6</p>
	<p>Product Name: XR Series</p> <p>Power Levels: 2 kW, 4 kW, 6 kW, 8 kW, 10 kW</p> <p>Voltage Range: Models from 0-5 Vdc to 0-10000 Vdc</p> <p>Current Range: Models from 0-0.2 Adc to 0-600 Adc</p> <p>Enclosure: Rack-mount, 2U</p>	<p>Page</p> <p>10</p>
	<p>Product Name: TS Series</p> <p>Power Levels: 5 kW, 10 kW, 15 kW, 20 kW, 25 kW, 30 kW, 45 kW</p> <p>Voltage Range: Models from 0-5 Vdc to 0-4000 Vdc</p> <p>Current Range: Models from 0-1.2 Adc to 0-375 Adc</p> <p>Enclosure: Rack-mount, 3U to 9U</p>	<p>Page</p> <p>14</p>
	<p>Product Name: MS Series</p> <p>Power Levels: 30 kW, 45 kW, 60 kW, 75 kW</p> <p>Voltage Range: Models from 0-5 Vdc to 0-4000 Vdc</p> <p>Current Range: Models from 0-7.2 Adc to 0-4500 Adc</p> <p>Enclosure: Floor-Standing Cabinet</p>	<p>Page</p> <p>18</p>
	<p>Product Name: MT Series</p> <p>Power Levels: 100 kW to 2000 kW+</p> <p>Voltage Range: Models from 0-16 Vdc to 0-4000 Vdc</p> <p>Current Range: Models from 0-24 Adc to 0-24000 Adc</p> <p>Enclosure: Floor Standing Cabinet</p>	<p>Page</p> <p>22</p>

Magna-Power Electronics Programmable DC Power Supplies

Technology and Feature Overview

Innovative and Scalable

Magna-Power Electronics programmable DC power supplies combine the best of DC power processing with microprocessor embedded control. A combination of high and medium frequency power processing technologies improves response, shrinks package size, and reduces cost. All Magna-Power Electronics DC power supplies are current-fed and are more tolerant to abusive loads than conventional switching power supplies. This technology allows the power supply to operate under short-circuit conditions, open-circuit conditions and everything in between.

The programmable DC power supplies offer both master/slave parallel and series operation. This enables two or more power supplies to be placed in parallel for increased output current or in series for increased output voltage, within the unit's isolation limits. With master/slave operation, power supplies operate at near equal voltage and current. The process of master/slaving power supplies is plug & play with the use of Magna-Power Electronics UID47 option, which can be added at any time.

All supplies can operate as a voltage source or current source depending on the control settings and load conditions. If the power supply is operating as a voltage source and the load increases to a point beyond the current command setting, the power supply automatically crosses over to current mode control and operates as a current source at that setting.

Designed for Safety

Magna-Power Electronics programmable DC power supplies have extensive diagnostic functions—all of which, when activated, take command to shut down the system. Diagnostic functions include phase loss, excessive thermal conditions, over voltage trip, over current trip, fuse clearing, and program line. Program line monitors externally applied analog set point signals to insure they are within the specified range. Upon a diagnostic fault condition, main power is disconnected and the diagnostic condition is latched into memory. Pressing the clear key clears the memory. All diagnostic functions can be monitored through the rear connector and software. Furthermore, control functions can also be set through the rear connector to allow simultaneous control of one or more power supplies.

The power supplies have three levels of over voltage/current protection: shutdown of controlling insulated gate bipolar transistors (IGBTs), disconnect of main power and input fuses. After an over voltage/current trip condition, the supply fault must be cleared.

Isolated External I/O for Automation

Using the rear isolated 37-pin I/O connector, the programmable power supplies can be completely controlled and monitored using external signals. The voltage, current, over voltage and over current set points are set by applying a 0-10V analog signal. Each diagnostic condition is given a designated pin, which reads +5V when high. Reference +5V and +10V signals are provided, eliminating the need for external voltage signals and allowing the use of dry contacts. Also, the power supply features a normally closed external interlock, which when enabled, allows the power supply to be tied in with other emergency stop equipment. All these pins are isolated to earth-ground as standard—no additional isolation equipment or options necessary.

Fully Programmable

The Magna-Power Electronics programmable DC power supplies can be programmed and monitored using three possible sources:

- Stepless front panel programming knobs
- External analog/digital signals
- Computer interface through included software, LabVIEW, or other programming environment

The power supply can be programmed to have its control functions accessible from the front panel, rear connector, RS232 (standard), LXI TCP/IP Ethernet (+LXI), IEEE 488 GPIB (+GPIB), USB Edgeport (+USB), or RS485DSS (+RS485) communications. The included IVI driver enables programming in a variety of software environments, including: Visual C++, Visual C#, Visual Basic .NET, Visual Basic 6.0, LabVIEW, LabWindows/CVI, MATLAB, Measure Foundry, and Agilent VEE Pro. Basic programming requirements are satisfied by the instrument's supported Standard Commands for Programmable Instruments (SCPI). Sensing can be established at the output terminal of the power supply or through a rear remote sense terminals for sensing at the load. Even calibration has been simplified with front panel access to digital calibration potentiometers.

Attention to Power Quality

All Magna-Power Electronics power supplies contain circuitry to work harmoniously with other power equipment. Step-start contactors are used to keep inrush current below full scale operating current. Filter components lower current harmonic content emanating from the power supply and increase power factor to levels beyond 90%. Every power supply is tested at 90% to 125% nominal line to insure satisfactory operation even under the worst line voltage conditions.

Electronic Output Stage

The novel electronic output stage (SL/XR/TS/MS Series) utilizes near constant power loading under all conditions via an electronic bleed resistance. This electronic bleeder means stability under all operating conditions and faster fall times, without affecting the overall system efficiency.




Higher Quality Power Processing

LXI TCP/IP Ethernet Interface Option (+LXI)



LXI is an instrumentation platform based on industry standard Ethernet technology designed to provide modularity, flexibility and performance to small- and medium-sized systems. Certified to the LXI Standard (Class C), Magna-Power Electronics +LXI option includes an embedded web-server, allowing web browser power supply control and monitoring from virtually anywhere and a universal IVI driver.


Remote Interface Software

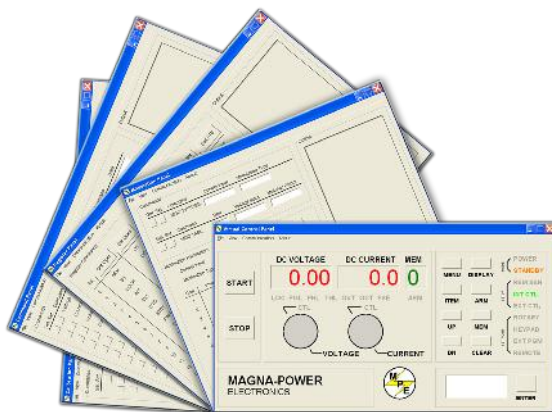

The Remote Interface Software ships with all power supplies. The software provides the user with an easy and intuitive method to operate a Magna-Power Electronics power supply with computer control. The Remote Interface Software has six windows: Virtual Control Panel, Command Panel, Register Panel, Calibration Panel, Firmware Panel, and Modulation Panel.

Key Product Line Features:

Magna-Power Electronics has designed its products from the ground up to provide synergy across the entire product line. The following are some of the company's programmable DC power supplies key features:

- **Industry leading power density**
Rack-mount space is always at a premium. Magna-Power Electronics power supplies are continuously refined with new technology and devices to drive down size and increase power density.
- **High accuracy programming**
 $\pm 0.075\%$ full scale programming accuracy on all models and programming interfaces.
- **High power factor: > 0.92 on all 3 Φ models:**
Attention to AC power quality and input inductance enables a high power factor, consistent across all 3 Φ input voltages.
- **Standard 37-pin isolated I/O and RS232**
- **Multiple front panel types for flexibility**
- **Extensive programming interface options**
- **CE Mark safety and EMI/EMC certification**
- **Made in USA** 
All products are designed and manufactured at Magna-Power Electronics vertically integrated headquarters in Flemington, NJ USA

Protective Diagnostic Features:

- Over-voltage protection (OVT) (*Programmable*)
- Over-current protection (OCT) (*Programmable*)
- Over-temperature protection (THL)
- Interlock fault (LOC)
- Fuse fault (FUSE)
- Phase loss alarm (PHL)
- Analog programming line voltage fault (PGM LN)
- Remote sense lead detection (REM SEN)

SL Series: 1.5 kW to 6 kW



SL Series 1.5 kW, 2.6 kW, 4 kW, 6 kW

Product Name:	SL Series
Number of Models:	70
Power Levels:	1.5 kW, 2.6 kW, 4 kW, and 6 kW
Voltage Range:	Models from 0-5 Vdc to 0-1000 Vdc
Current Range:	Models from 0-1.5 Adc to 0-250 Adc
Enclosure	Rack-mount, 1U

Overview

Magna-Power Electronics SL Series was designed for high reliability and to provide market leading 1U (1.75" height) rack-mount power density, with output isolation up to 1000 Vdc. This product series utilizes Magna-Power Electronics signature current-fed power processing, delivering robust power conversion with high efficiency. A wide variety of input voltages are available, from 208 Vac up to 480 Vac. A single-phase universal input (UI) featuring active power factor correction is available for 1.5 kW models. High accuracy programming and monitoring levels allow confidence in power supply measurements, eliminating the need for external power meters.

All SL Series power supplies come standard with isolated 37-pin external I/O, RS232, Remote Interface Software, IVI drivers for integration into a variety of programming environments, and modulation capabilities for non-linear output profile emulation. Two front panel types are available for different application requirements. The standard SL Version front panel (pictured in the image above) provides front panel control and calibration, start and stop buttons, and a digital display for voltage and current. The C Version front panel provides a blank display panel, allowing control only from the computer or isolated 37-pin I/O connection.

Available Options

- Single Phase Universal Input (UI) (1.5 kW Only)
- Cabinet and Integrations (+CAB1, +CAB2, +CAB3)
- High Slew Rate Output (+HS)
- IEEE-488 GPIB Interface (+GPIB)
- LXI TCP/IP Ethernet Interface (+LXI)
- Photovoltaic Power Profile Emulation (+PPPE)
- RS-485DSS Interface (External) (+RS485)
- UID47: Universal Interface Device (+UID)
- USB Edgeport Interface (External) (+USB)



1U Programmable DC Power Supplies

SL Series Specifications

Input Specifications

Nominal Voltage 1 phase, 2 wire + ground	85 - 265 Vac, 1Φ (UI—Universal input) (Available on 1.5 kW Models Only)
Nominal Voltage 3 phase, 3 wire + ground	208 Vac, 3Φ (operating range 187 - 229 Vac) 240 Vac, 3Φ (operating range 216 - 264 Vac) 380 Vac, 3Φ (operating range 342 - 418 Vac) 415 Vac, 3Φ (operating range 373 - 456 Vac) 440 Vac, 3Φ (operating range 396 - 484 Vac) 480 Vac, 3Φ (operating range 432 - 528 Vac)
Frequency	50 Hz - 400 Hz (operating range 45 - 440 Hz)
Power Factor	0.99 at maximum power for 1Φ units > 0.82 at maximum power for 3Φ units

Output Specifications

Ripple	(See Models Chart)
Line Regulation	Voltage Mode: $\pm 0.004\%$ of full scale Current Mode: $\pm 0.02\%$ of full scale
Load Regulation	Voltage Mode: $\pm 0.01\%$ of full scale Current Mode: $\pm 0.04\%$ of full scale
Load Transient Response	2 ms to recover within $\pm 1\%$ of full scale output, with a 50% to 100% or 100% to 50% step load change
Efficiency	$\geq 86\%$ at full load (See Models Chart)
Stability	$\pm 0.10\%$ for 8 hrs. after 30 min. warmup
Isolation	User inputs and outputs: referenced to earth ground Maximum input voltage to ground: ± 2500 Vac Maximum output voltage to ground: ± 1000 Vdc
Maximum Slew Rate	Standard Models: 100 ms for output voltage change from 0 to 63% 100 ms for output current change from 0 to 63% With High Slew Rate Option (+HS): 4 ms for output voltage change from 0 to 63% 8 ms for output current change from 0 to 63%
Bandwidth	Standard Models: 3 Hz for remote analog voltage programming 2 Hz for remote analog current programming With High Slew Rate Option (+HS): 60 Hz for remote analog voltage programming 45 Hz for remote analog current programming

Physical Specifications


Power	Size (H" x W" x D")	Weight
1.5 kW	1.75 x 19 x 24 in (4.44 x 48.3 x 61.0 cm)	32 lbs (14.52 kg)
2.6 kW	1.75 x 19 x 24 in (4.44 x 48.3 x 61.0 cm)	34 lbs (15.42 kg)
4 kW	1.75 x 19 x 24 in (4.44 x 48.3 x 61.0 cm)	35 lbs (15.88 kg)
6 kW	1.75 x 19 x 24 in (4.44 x 48.3 x 61.0 cm)	35 lbs (15.88 kg)

Control Specifications

Voltage Programming Accuracy	$\pm 0.075\%$ of full scale voltage
OVT Programming Accuracy	$\pm 0.075\%$ of full scale voltage
Current Programming Accuracy	$\pm 0.075\%$ of full scale current
OCT Programming Accuracy	$\pm 0.075\%$ of full scale current
Voltage Readback Accuracy	$\pm 0.2\%$ of full scale voltage
Current Readback Accuracy	$\pm 0.2\%$ of full scale current
External Analog Programming and Monitoring Levels	0 - 10 Vdc
External Analog Output Impedances	Voltage output monitoring: 100 Ω Current output monitoring: 100 Ω +10 Vdc reference: 1 Ω
External Digital Programming and Monitoring Limits	Input: 0 to 5 Vdc, 10k input impedance Output: 0 to 5 Vdc, 5 mA drive capacity
Remote Sense Limits	3% maximum voltage drop from output to load

Environmental Specifications


Ambient Operating Temperature	0 °C to 50 °C
Storage Temperature	-25 °C to 85 °C
Humidity	Relative humidity up to 95% non-condensing
Temperature Coefficient	0.04 % / °C of maximum output voltage 0.06 % / °C of maximum output current

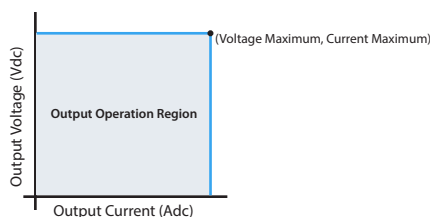

Note: Specifications are subject to change without notice. For three-phase configurations, input specifications are line-to-line. Unless otherwise noted, input voltages and currents are specified for three-phase configurations.

SL Series Models

Model Ordering Guide

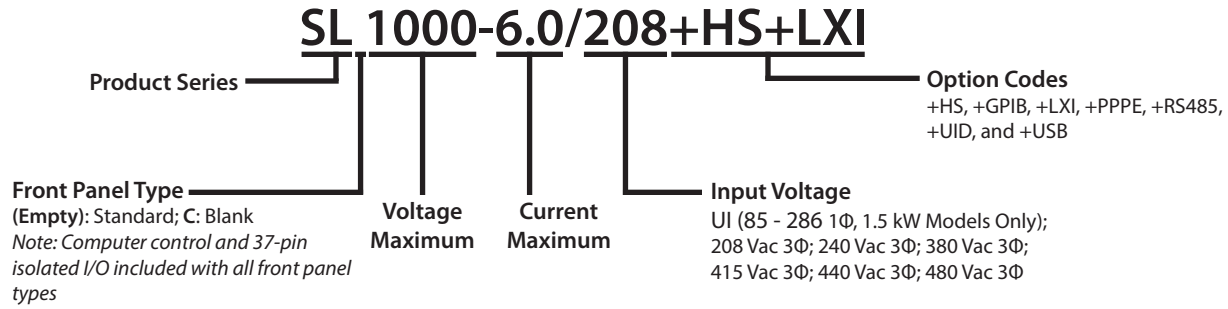

Models Chart


The following chart details the available standard SL Series models. The Current Maximum (A_{dc}) column is separated by the available power levels. To determine the appropriate model, first select your output Voltage Maximum (V_{dc}) to find appropriate row. Next, select one desired Current Maximum from the row that contains your desired Voltage Maximum. Then, construct your model number according to the model ordering guide, above. Non-standard voltage and current configurations are available.

	1.5 kW	2.6 kW	4 kW	6 kW		
Voltage Maximum (V _{dc})	Current Maximum (A _{dc})				Ripple (mV _{rms})	Efficiency (%)
5	250	N/A	N/A	N/A	50	86
10	150	250	N/A	N/A	40	86
16	93*	162	250	N/A	35	86
20	75*	130	200	250	40	86
32	46*	81	125	186	40	86
40	37*	65	100	150	40	87
50	30	52	80	120	50	87
80	18	32	50	75	60	87
100	15*	26	40	60	60	87
125	12	20	32	48	100	87
160	9*	16	25	36	120	87
200	7.5*	13	20	30	125	87
250	6	10.4	16	24	130	88
375	4*	6.9	10.4	16	170	88
400	3.7*	6.5	10	15	180	88
500	3*	5.2	8	12	220	88
600	2.5	4.3	6.4	10	250	88
800	1.8	3.2	5.0	7.5	300	88
1000	1.5	2.6	4.0	6.0	350	88
	Input Current Per Phase (A _{ac})					
UI (85 - 265 Vac, 1Φ)	21 - 7	N/A	N/A	N/A		
208/240 Vac, 3Φ	6	11	16	24		
380/415 Vac, 3Φ	5	8	11	16		
440/480 Vac, 3Φ	4	6	9	14		

(*) Indicates non-stock model, available at a price premium for quantities less than 5. Stock pricing available for UI input only. Ripple specified for standard models. For models with the High Slew Rate Output Option (+HS), ripple will be higher.

SL Series Diagrams

SL Front Panel (Standard)


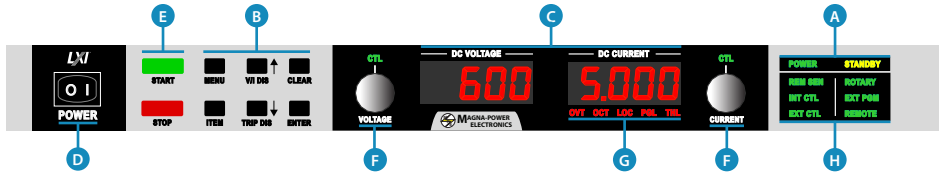


C Version Front Panel




Optional (+LXI) Interface


Optional (+GPIB) Interface




Front View

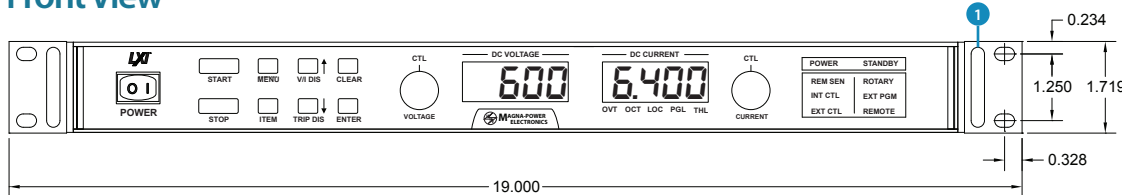


Rear View

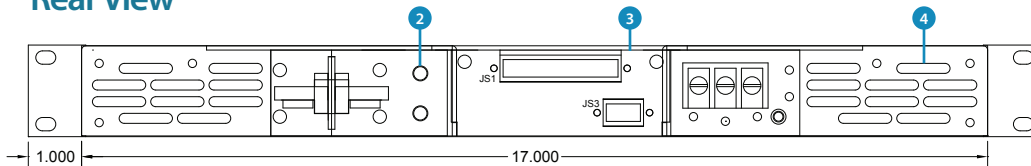

Top View (Rear Side)

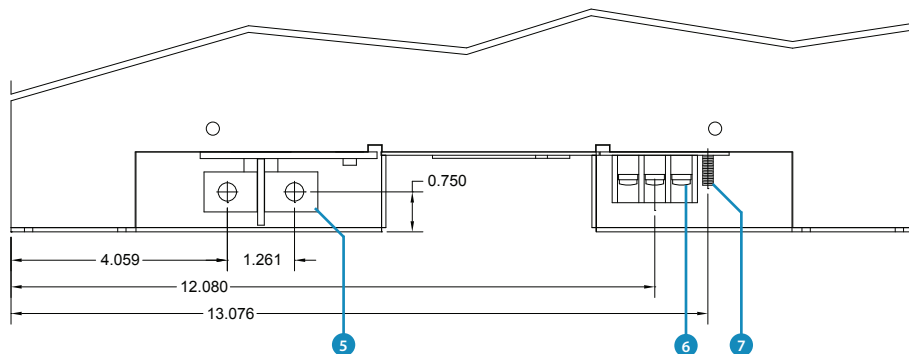

Side View

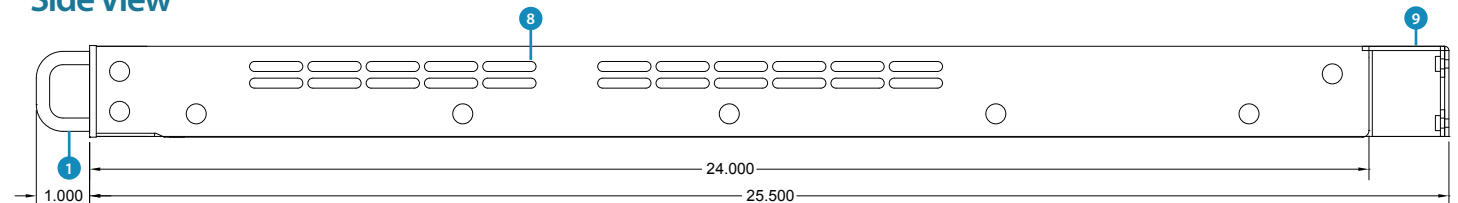

- A** MODE
POWER: Indicates power output
STANDBY: Indicates control power only
- B** FUNCTION KEYS
MENU: Selects function
ITEM: Selects item within function
V/I DIS: Displays voltage/current settings
TRIP DIS: Displays OVT and OCT settings
CLEAR: Clears setting or resets fault
ENTER: Selects item
- C** Meters display output voltage, output current, voltage set point, current set point, over voltage trip, and over current trip
- D** Power switch energized control circuits without engaging main power
- E** Engages and disengages main power
- F** Stepless rotary knob to set voltage/current
- G** DIAGNOSTIC ALARMS
LOC: Interlock
PGL: External input voltage beyond limits
THL: Indicates over-temperature condition
OVT: Over-voltage protection has tripped
OCT: Over-current protection has tripped
- H** CONFIGURATION
REM SEN: Remote sense enabled
INT CTL: Front panel start/stop/clear enabled
EXT CTL: External start/stop/clear enabled
ROTARY: Front panel control
EXT PGM: External voltage/current control
REMOTE: Computer control

- 1** Front Panel Handles (Removable)
- 2** Remote Sense Connections
- 3** Computer and External Control Connections
- 4** Rear Air Exhaust
- 5** Output DC Connections
0.25" x 0.75" Tin Plated Copper Bus
Qty (2) 3/8-16 Threaded Insert
- 6** Input AC Connections
38660 Molex Input Connector
- 7** 10-32 Ground Stud
- 8** Side Air Intake
- 9** Qty (2) Rear Metal Covers (Removable)

XR Series: 2 kW to 10 kW



XR Series 2 kW, 4 kW, 6 kW, 8 kW, and 10 kW

Product Name:	XR Series
Number of Models:	126
Power Levels:	2 kW, 4 kW, 6 kW, 8 kW, and 10 kW
Voltage Range:	Models from 0-5 Vdc to 0-10000 Vdc
Current Range:	Models from 0-2.0 Adc to 0-600 Adc
Enclosure	Rack-mount, 2U

Overview

Magna-Power Electronics XR Series was designed from the ground up for high reliability and industry leading 2U (3.5" height) rack-mount power density, with output isolation for units rated up through 2000 Vdc. This product series utilizes Magna-Power Electronics signature current-fed power processing, delivering robust power conversion with a high power factor—greater than 0.92 for 3Φ units. Soft-start circuitry on the input minimizes in-rush current to levels below the rated input current. High accuracy programming and monitoring levels allow confidence in power supply measurements, eliminating the need for external power meters.

All XR Series power supplies come standard with isolated 37-pin external I/O, RS232, Remote Interface Software, IVI drivers for integration into a variety of programming environments, and modulation capabilities for non-linear output profile emulation. Two front panel types are available for different application requirements. The standard XR Version front panel (pictured in the image above) provides front panel control knobs and calibration, start and stop buttons, and a digital display for voltage and current. The C Version front panel provides a blank display panel, allowing control only from the computer or isolated 37-pin I/O connection.

Available Options

- 208/240 Vac Single-Phase Input (SP) (2 kW Only)
- Cabinet and Integrations (+CAB1, +CAB2, +CAB3)
- High Slew Rate Output (+HS)
- IEEE-488 GPIB Interface (+GPIB)
- LXI TCP/IP Ethernet Interface (+LXI)
- Photovoltaic Power Profile Emulation (+PPPE)
- RS-485DSS Interface (External) (+RS485)
- UID47: Universal Interface Device (+UID)
- USB Edgeport Interface (External) (+USB)



(15) XR Series Power Supplies with +CAB3 Option

XR1000-8.0: 0-1000 Vdc, 0-8.0 Adc, 8 kW



2U Programmable DC Power Supplies

XR Series Specifications

Input Specifications

Nominal Voltage	208 Vac, 3Φ (operating range 187 - 229 Vac)
3 phase, 3 wire + ground	240 Vac, 3Φ (operating range 216 - 264 Vac) 380 Vac, 3Φ (operating range 342 - 418 Vac) 415 Vac, 3Φ (operating range 373 - 456 Vac) 440 Vac, 3Φ (operating range 396 - 484 Vac) 480 Vac, 3Φ (operating range 432 - 528 Vac)
1 phase, 2 wire + ground (2 kW Models Only)	208 Vac, 1Φ (operating range 187 - 229 Vac) 240 Vac, 1Φ (operating range 216 - 264 Vac)
Frequency	50 Hz - 400 Hz (operating range 45 - 440 Hz)
Power Factor	> 0.92 at maximum power for 3Φ units > 0.70 at maximum power for 1Φ units

Output Specifications

Ripple	(See Models Chart)
Line Regulation	Voltage Mode: ± 0.004% of full scale Current Mode: ± 0.02% of full scale
Load Regulation	Voltage Mode: ± 0.01% of full scale Current Mode: ± 0.04% of full scale
Load Transient Response	2 ms to recover within ±1% of full scale output, with a 50% to 100% or 100% to 50% step load change
Efficiency	≥ 86% at full load (See Model Charts)
Stability	± 0.10% for 8 hrs. after 30 min. warmup
Isolation	User inputs and outputs: referenced to earth ground Maximum input voltage to ground: ±2500 Vac Maximum output voltage to ground: • Models ≤ 1000 Vdc: ±1000 Vdc • Models > 1000 Vdc and ≤ 2000 Vdc: ±(2000 Vdc + Vo/2) • Models > 2000 Vdc: No output isolation, specify positive or negative output polarity
Maximum Slew Rate	Standard Models, 1000 Vdc and below: 100 ms for output voltage change from 0 to 63% 100 ms for output current change from 0 to 63% With High Slew Rate Option (+HS) and models > 1000 Vdc: 4 ms for output voltage change from 0 to 63% 8 ms for output current change from 0 to 63%
Bandwidth	Standard Models, 1000 Vdc and below: 3 Hz for remote analog voltage programming 2 Hz for remote analog current programming With High Slew Rate Option (+HS) and models > 1000 Vdc: 60 Hz for remote analog voltage programming 45 Hz for remote analog current programming

Physical Specifications


Power	Size (H" x W" x D")	Weight
2 kW	3.50 x 19 x 24 in (8.89 x 48.3 x 61.0 cm)	45 lbs (20.41 kg)
4 kW	3.50 x 19 x 24 in (8.89 x 48.3 x 61.0 cm)	47 lbs (21.32 kg)
6 kW	3.50 x 19 x 24 in (8.89 x 48.3 x 61.0 cm)	48 lbs (21.77 kg)
8 kW	3.50 x 19 x 24 in (8.89 x 48.3 x 61.0 cm)	48 lbs (21.77 kg)
10 kW	3.50 x 19 x 24 in (8.89 x 48.3 x 61.0 cm)	48 lbs (21.77 kg)

Control Specifications

Voltage Programming Accuracy	± 0.075% of full scale voltage
OVT Programming Accuracy	± 0.075% of full scale voltage
Current Programming Accuracy	± 0.075% of full scale current
OCT Programming Accuracy	± 0.075% of full scale current
Voltage Readback Accuracy	± 0.2% of full scale voltage
Current Readback Accuracy	± 0.2% of full scale current
External Analog Programming and Monitoring Levels	0 - 10 Vdc
External Analog Output Impedances	Voltage output monitoring: 100 Ω Current output monitoring: 100 Ω +10 Vdc reference: 1 Ω
External Digital Programming and Monitoring Limits	Input: 0 to 5 Vdc, 10k input impedance Output: 0 to 5 Vdc, 5 mA drive capacity
Remote Sense Limits	3% maximum voltage drop from output to load No remote sense on models above 1000 Vdc

Environmental Specifications


Ambient Operating Temperature	0 °C to 50 °C
Storage Temperature	-25 °C to 85 °C
Humidity	Relative humidity up to 95% non-condensing
Temperature Coefficient	0.04 % / °C of maximum output voltage 0.06 % / °C of maximum output current
Air Flow	Side air inlet, rear exhaust

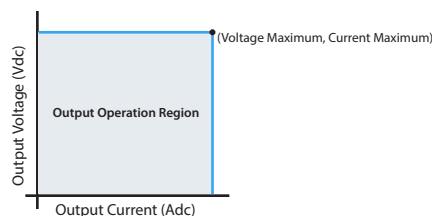

Note: Specifications are subject to change without notice. For three-phase configurations, input specifications are line-to-line. Unless otherwise noted, input voltages and currents are specified for three-phase configurations.

XR Series Models

Model Ordering Guide

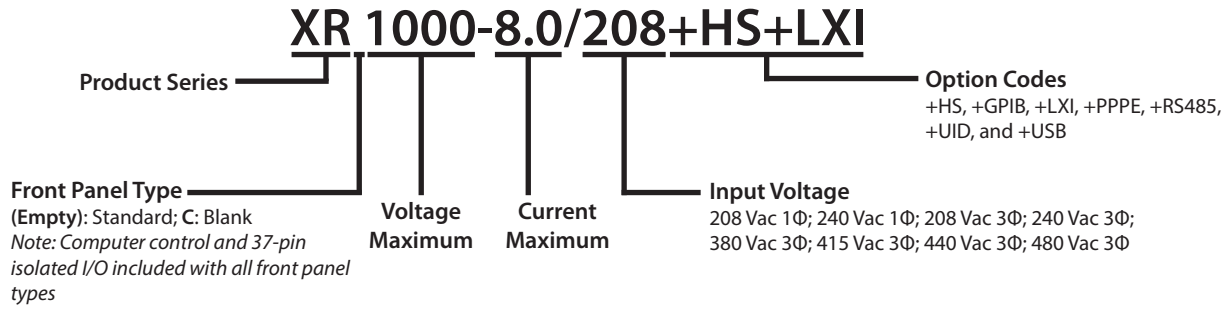

Models Chart


The following chart details the available standard XR Series models. The Current Maximum (A_{dc}) column is separated by the available power levels. To determine the appropriate model, first select your output Voltage Maximum (V_{dc}) to find appropriate row. Next, select one desired Current Maximum from the row that contains your desired Voltage Maximum. Then, construct your model number according to the model ordering guide, above. Non-standard voltage and current configurations are available.

	2 kW	4 kW	6 kW	8 kW	10 kW		
Voltage Maximum (V _{dc})	Current Maximum (A _{dc})					Ripple (mV _{rms})	Efficiency (%)
5	375	600	N/A	N/A	N/A	50	86
10	200	375	600	N/A	N/A	50	86
16	125	250	375	500	600	50	86
20	100	200	300	375	500	45	86
32	62	124	186	250	310	40	86
40	50	100	150	200	250	40	87
50	40	80	120	160	200	50	87
80	25	50	75	100	125	60	87
100	20	40	60	80	100	60	87
125	16	32	48	64	80	100	87
160	12	24	36	50	60	120	87
200	10	20	30	40	50	125	87
250	8	16	24	32	40	130	88
375	5.3	10.6	15.9	21.3	26.5	170	88
400	5.0	10.0	15.0	20.0	25	180	88
500	4.0	8.0	12.0	16.0	20	220	88
600	3.3	6.6	9.9	13.3	16.5	250	88
800	2.5	5.0	7.5	10.0	12.5	300	88
1000	2.0	4.0	6.0	8.0	10	350	88
1250	1.6	3.2	4.8	6.4	8.0	375	88
1500	1.3	2.6	4.0	5.3	6.6	400	88
2000	1.0	2.0	3.0	4.0	5.0	450	88
4000	0.50	1.00	1.50	2.00	N/A	6500	88
6000	0.30	0.66	1.00	1.33	N/A	7500	88
8000	0.25	0.50	0.75	1.00	N/A	8500	88
10000	0.20	0.40	0.60	0.80	N/A	9500	88
	Input Current Per Phase (A _{ac})						
208/240 Vac, 1Φ	16	N/A	N/A	N/A	N/A		
208/240 Vac, 3Φ	8	15	22	29	36		
380/415 Vac, 3Φ	5	9	13	17	21		
440/480 Vac, 3Φ	4	8	11	15	18		

Note: Models above 2000 V_{dc} have high slew rate output. For models 2000 V_{dc} and below with the High Slew Rate Output Option (+HS), ripple will be higher.

XR Series Diagrams

XR Front Panel (Standard)

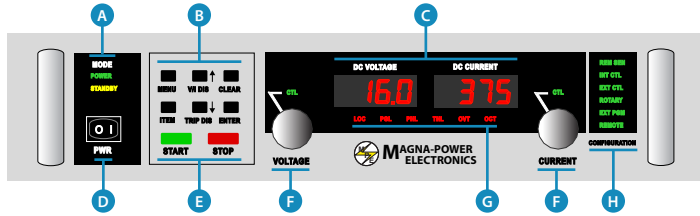

- A** MODE
POWER: Indicates power output
STANDBY: Indicates control power only
- B** FUNCTION KEYS
MENU: Selects function
ITEM: Selects item within function
V/I DIS: Displays voltage/current settings
TRIP DIS: Displays OVT and OCT settings
CLEAR: Clears setting or resets fault
ENTER: Selects item
- C** Meters display output voltage, output current, voltage set point, current set point, over voltage trip, and over current trip


- D** Power switch energizes control circuits without engaging main power
- E** Engages and disengages main power
- F** Stepless rotary knob to set voltage/current
- G** DIAGNOSTIC ALARMS
LOC: Interlock
PGL: External input voltage beyond limits
PHL: Indicates under-voltage AC input
THL: Indicates over-temperature condition
OVT: Over-voltage protection has tripped
OCT: Over-current protection has tripped

C Version Front Panel



- H** CONFIGURATION
REM SEN: Remote sense enabled
INT CTL: Front panel start/stop/clear enabled
EXT CTL: External start/stop/clear enabled
ROTARY: Front panel control
EXT PGM: External voltage/current control
REMOTE: Computer control

Rear View

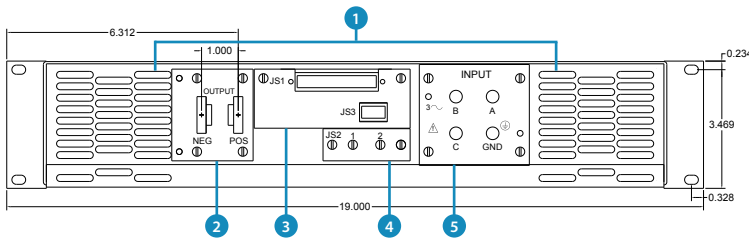

DC Output Bus Connections


Standard Output Bus:
Models ≤1000 Vdc
0.250 x 1.000 Tin Plated Copper Bus
3/8-16 Threaded Insert, Qty (2)

Very High Voltage Output Bus
Models >2000 Vdc
83-1R Receptacle High Voltage
Mating Cable Provided


High Voltage Output Bus
Models >1000 Vdc and ≤2000 Vdc
1/4-28 Bolt, 2 PLC's

Optional External Controls


Optional (+LXI) Interface




Optional (+GPIB) Interface



Side View

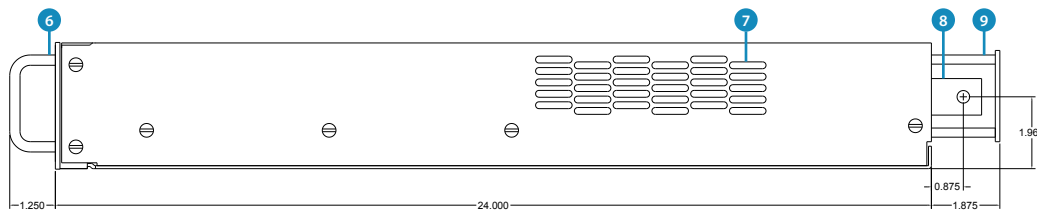

High Voltage Output Cable (Included, Models Above 2000 Vdc)



- 1** Rear Air Exhaust
- 2** Output DC Connections (Front View)
- 3** Computer and External Control Connections
- 4** Remote Sensing Connector
Models ≤1000 Vdc Only
- 5** Input AC Connections
10-32 Threaded Insert, Qty (4)
- 6** Front Panel Handles
- 7** Side Air Intake
- 8** Output DC Connections (Side View)
Connection Varies By Rated Output Voltage
Refer to "DC Output Bus Connections"
- 9** Included Rear Protective Metal Cover
- 10** RG-8/U Coaxial Cable
- 11** PL-259 Connector

TS Series: 5 kW to 45 kW



TS Series 5 kW, 10 kW, and 15 kW Models (3U)



TS Series 20 kW, 25 kW, and 30 kW Models (6U)



TS Series 45 kW Models (9U)

Available Options

- 208/240 Vac Single-Phase Input (SP) (5 kW Only)
- Cabinet and Integrations (+CAB1, +CAB2, +CAB3)
- High Isolation Output (+ISO)
- High Slew Rate Output (+HS)
- IEEE-488 GPIB Interface (+GPIB)
- LXI TCP/IP Ethernet Interface (+LXI)
- Photovoltaic Power Profile Emulation (+PPPE)
- RS-485DSS Interface (External) (+RS485)
- UID47: Universal Interface Device (+UID)
- USB Edgeport Interface (External) (+USB)
- Water Cooling (+WC)

Product Name:	TS Series
Number of Models:	80
Power Levels:	5 kW, 10 kW, 15 kW, 20 kW, 25 kW, 30 kW, and 45 kW
Voltage Range:	Models from 0-5 Vdc to 0-4000 Vdc
Current Range:	Models from 0-1.2 Adc to 0-375 Adc
Enclosure	Rack-mount, 3U to 9U

Overview

Magna-Power Electronics TS Series provides a wide voltage and current range while still maintaining among the highest power density rack-mount packaging. The TS Series covers voltages from 5 Vdc up to 4000 Vdc (floating) and current levels from 1.2 Adc up to 2700 Adc. Models 5 kW to 15 kW are available in a 3U chassis, models 20 kW to 30 kW are available in a 6U chassis, and 45 kW models are available in a 9U chassis. In addition, there are several special low voltage high current models (Page 23), enabling a more cost-effective solution for these requirements.

All TS Series power supplies come standard with isolated 37-pin external I/O, RS232, Remote Interface Software, IVI drivers for integration into a variety of programming environment. Three front panel types are available (Page 22) for maximum application flexibility. The A Version provides front panel control and calibration, start and stop buttons, and a digital display for voltage and current. The D Version front panel adds a 10-key digital front panel entry, memory sequencing, and modulation capabilities for non-linear output profile emulation.



Mobile TS Series Power Supplies, Part of the F-35 Joint Strike Fighter (JSF) Program



3U to 9U Rack-Mount Power Supplies

TS Series Specifications

Input Specifications

Nominal Voltage	208 Vac, 3Φ (operating range 187 - 229 Vac)
3 phase, 3 wire + ground	240 Vac, 3Φ (operating range 216 - 264 Vac) 380 Vac, 3Φ (operating range 342 - 418 Vac) 415 Vac, 3Φ (operating range 373 - 456 Vac) 440 Vac, 3Φ (operating range 396 - 484 Vac) 480 Vac, 3Φ (operating range 432 - 528 Vac)
1 phase, 2 wire + ground (5 kW Models Only)	208 Vac, 1Φ (operating range 187 - 229 Vac) 240 Vac, 1Φ (operating range 216 - 264 Vac)
Frequency	50 Hz - 400 Hz (operating range 45 - 440 Hz)
Power Factor	> 0.92 at maximum power for 3Φ units > 0.70 at maximum power for 1Φ units

Output Specifications

Ripple	(See Models Chart)
Line Regulation	Voltage Mode: ± 0.004% of full scale Current Mode: ± 0.02% of full scale
Load Regulation	Voltage Mode: ± 0.01% of full scale Current Mode: ± 0.04% of full scale
Load Transient Response	2 ms to recover within ±1% of full scale output, with a 50% to 100% or 100% to 50% step load change
Efficiency	≥ 86% at full load (See Model Charts)
Stability	± 0.10% for 8 hrs. after 30 min. warmup
Isolation	User inputs and outputs: referenced to earth ground. Maximum input voltage to ground: ±2500 Vac. Maximum output voltage to ground: ±1000 Vdc for models less than or equal to 1000 Vdc ±(2000 Vdc + Vo/2) for models greater than 1000 Vdc or with High Isolation Option (+HSO) where Vo is the unit's output voltage maximum
Maximum Slew Rate	Standard Models: 100 ms for output voltage change from 0 to 63% 100 ms for output current change from 0 to 63% With High Slew Rate Option (+HS): 4 ms for output voltage change from 0 to 63% 8 ms for output current change from 0 to 63%
Bandwidth	Standard Models: 3 Hz for remote analog voltage programming 2 Hz for remote analog current programming With High Slew Rate Option (+HS): 60 Hz for remote analog voltage programming 45 Hz for remote analog current programming

Note: Specifications are subject to change without notice. For three-phase configurations, input specifications are line-to-line. Unless otherwise noted, input voltages and currents are specified for three-phase configurations.

Physical Specifications


Power	Size (H" x W" x D")	Rack Units	Weight
5 kW	5.25 x 19 x 24 in (13.3 x 48.3 x 61.0 cm)	3U	74 lbs (33.60 kg)
10 kW	5.25 x 19 x 24 in (13.3 x 48.3 x 61.0 cm)	3U	94 lbs (42.64 kg)
15 kW	5.25 x 19 x 24 in (13.3 x 48.3 x 61.0 cm)	3U	114 lbs (51.71 kg)
20 kW	10.25 x 19 x 24 in (26.0 x 48.3 x 61.0 cm)	6U	197 lbs (89.36 kg)
25 kW	10.25 x 19 x 24 in (26.0 x 48.3 x 61.0 cm)	6U	217 lbs (98.43 kg)
30 kW	10.25 x 19 x 24 in (26.0 x 48.3 x 61.0 cm)	6U	237 lbs (107.50 kg)
45 kW	15.75 x 19 x 24 in (40.0 x 48.3 x 61.0 cm)	9U	349 lbs (158.30 kg)

Control Specifications

Voltage Programming Accuracy	± 0.075% of full scale voltage
OVT Programming Accuracy	± 0.075% of full scale voltage
Current Programming Accuracy	± 0.075% of full scale current
OCT Programming Accuracy	± 0.075% of full scale current
Voltage Readback Accuracy	± 0.2% of full scale voltage
Current Readback Accuracy	± 0.2% of full scale current
External Analog Programming and Monitoring Levels	0 - 10 Vdc
External Analog Output Impedances	Voltage output monitoring: 100 Ω Current output monitoring: 100 Ω +10 Vdc reference: 1 Ω
External Digital Programming and Monitoring Limits	Input: 0 to 5 Vdc, 10 kΩ input impedance Output: 0 to 5 Vdc, 5 mA drive capacity
Remote Sense Limits	3% maximum voltage drop from output to load


Environmental Specifications

Ambient Operating Temperature	0 °C to 50 °C
Storage Temperature	-25 °C to 85 °C
Humidity	Relative humidity up to 95% non-condensing
Temperature Coefficient	0.04 % / °C of maximum output voltage 0.06 % / °C of maximum output current
Air Flow	Side air inlet, rear exhaust
Water Cooling (+WC Option) (Diagrams Available)	Inlet temperature: 25°C Flow rate (minimum): 1.5 GPM for 15 kW units 3.0 GPM for 20 to 30 kW units 4.5 GPM for 45 kW units 80 PSI maximum pressure

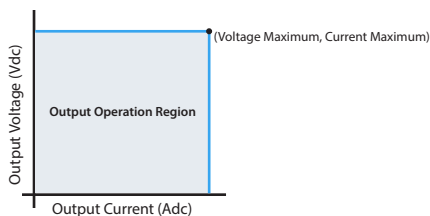

TS Series Models

Model Ordering Guide

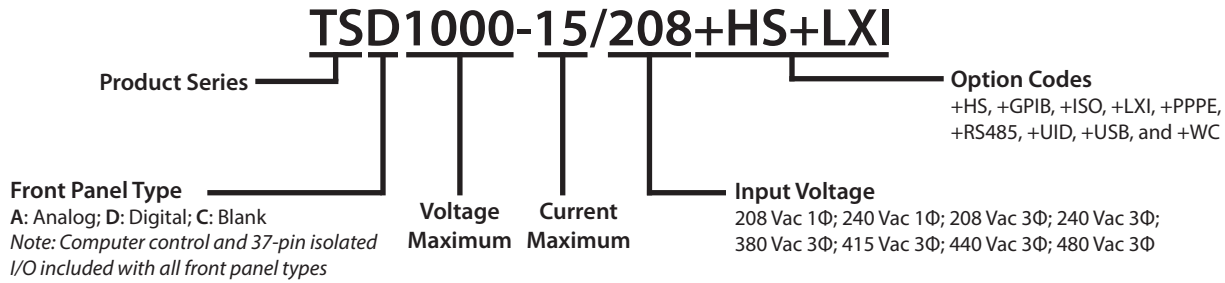

Models Chart

The following chart details the available standard TS Series models. The Current Maximum (A_{dc}) column is separated by the available power levels. To determine the appropriate model, first select your output Voltage Maximum (V_{dc}) to find appropriate row. Next, select one desired Current Maximum from the row that contains your desired Voltage Maximum. Then, construct your model number according to the model ordering guide, above. Non-standard voltage and current configurations are available.

Voltage Maximum (V _{dc})	5 kW	10 kW	15 kW	20 kW	25 kW	30 kW	45 kW	Ripple (mV _{rms})	Efficiency (%)	
	Current Maximum (A _{dc})									
5	900	N/A	N/A	N/A	N/A	N/A	N/A	50	86	
8	600	N/A	N/A	N/A	N/A	N/A	N/A	40	86	
10	500	900	N/A	N/A	N/A	N/A	N/A	40	86	
16	300	600	900	1200	1500	1800	2700	35	86	
20	250	500	750	1000	1250	1500	2250	40	86	
32	150	300	450	600	750	900	1350	40	86	
40	125	250	375	500	625	750	1125	40	87	
50	100	200	300	400	500	600	900	50	87	
80	62	124	186	248	310	372	558	60	87	
100	50	100	150	200	250	300	450	60	87	
125	40	80	120	160	200	240	360	100	87	
160	31	62	93	124	155	186	279	120	87	
200	25	50	75	100	125	150	225	125	87	
250	20	40	60	80	100	120	180	130	88	
375	13	26	39	52	65	78	117	170	88	
400	12	24	36	48	60	72	108	180	88	
500	10	20	30	40	50	60	90	220	88	
600	8	16	24	32	40	48	72	250	88	
800	6	12	18	24	30	36	54	300	88	
1000	5	10	15	20	25	30	45	350	88	
1250	4	8	12	16	20	24	36	375	88	
1500	3.3	6.6	9.9	13.2	16.5	19.8	27.7	400	88	
2000	2.5	5.0	7.5	10.0	12.5	15.0	22.5	450	88	
3000	1.6	3.2	4.8	6.4	8.0	9.6	14.4	500	88	
4000	1.2	2.4	3.6	4.8	6.0	7.2	10.8	550	88	
	Input Current Per Phase (A _{ac})									
208/240 Vac, 3Φ	19	36	54	72	90	108	162			
380/415 Vac, 3Φ	10	21	30	40	50	60	90			
440/480 Vac, 3Φ	9	18	27	36	45	54	81			


Note: 38 A_{ac} input current for 208/240 Vac, 1Φ input (5 kW models only). Ripple specified for standard models. For models with the High Slew Rate Output Option (+HS), ripple will be higher.

TS Series Diagrams


Physical Specifications

Power	A (in)	B (in)	C (in)
5 kW	2.250	N/A	5.219
10 kW	2.250	N/A	5.219
15 kW	2.250	N/A	5.219
20 kW	3.000	2.250	10.469
25 kW	3.000	2.250	10.469
30 kW	3.000	2.250	10.469
45 kW	4.750	4.000	15.719


Front View

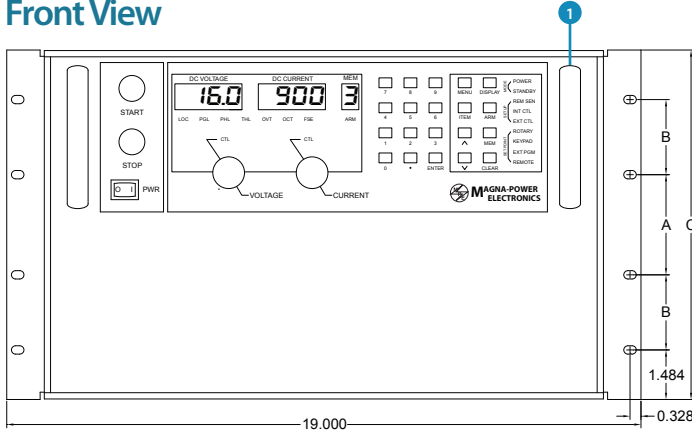


Rear View, Air-Cooled (20 kW to 30 kW)

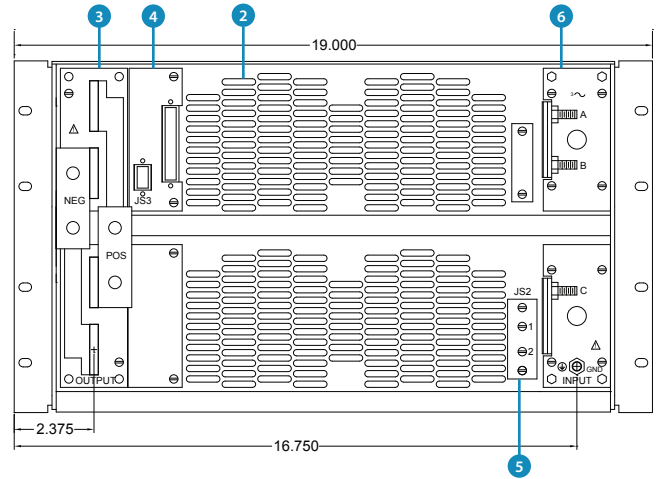


Rear View, Water-Cooled (20 kW to 30 kW)

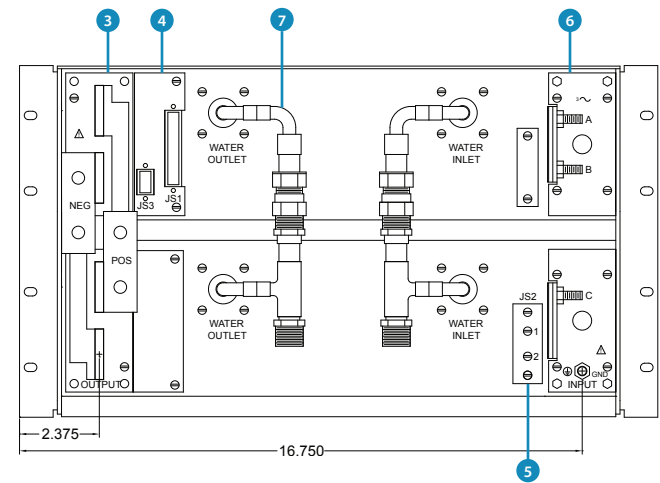


Rear View, Air-Cooled (5 kW to 15 kW)

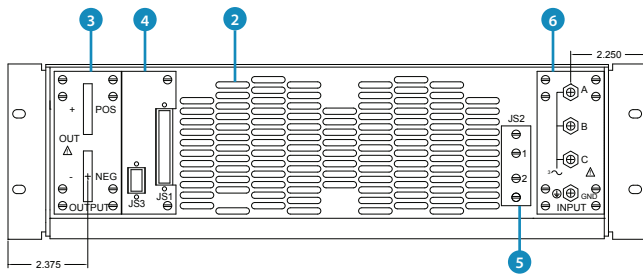


Side View (5 kW to 15 kW)

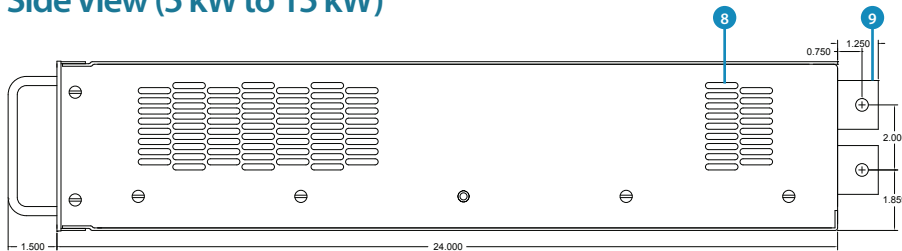


Side View (20 kW to 30 kW)

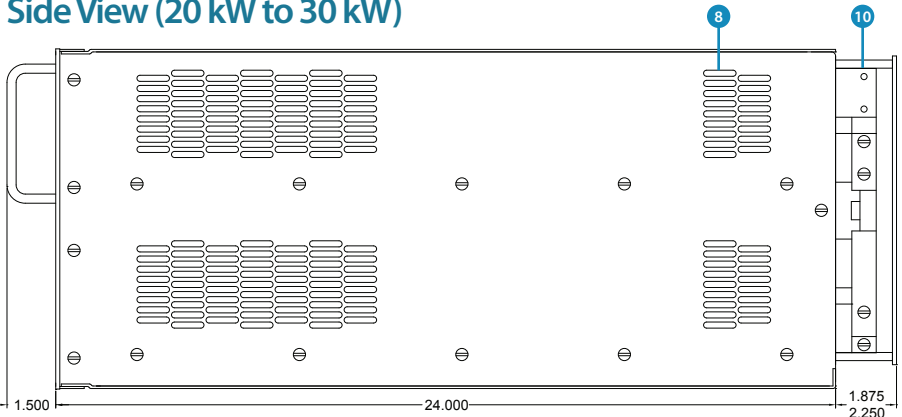


Output Bus for Models Greater Than 1000 Vdc



Optional (+LXI) Interface



Optional (+GPIB) Interface



- 1 Front Panel Handles
- 2 Rear Air Exhaust
- 3 Output DC Connections - 3/8-16 Threaded Insert
Qty (1) Insert Per Bus Bar, 5 kW to 15 kW Models
Qty (2) Inserts Per Bus Bar, 20 kW to 30 kW Models
Qty (4) Inserts Per Bus Bar, 45 kW Models
- 4 Computer and External Control Connections
- 5 Remote Sensing Connector
- 6 Input AC Connections
1/4-20 Bolt, Qty (4) PLC'S
- 7 Front Panel Handles
- 8 Side Air Intake (Air-Cooled Models Only)
- 9 Output DC Connections, 5 kW - 15 kW (Side View)
- 10 Output DC Connections, 20 kW - 45 kW (Side View)

Note: Metal Cover included for rear panel on 5 kW to 15 kW models. Stand-offs included for all other models.

MS Series: 30 kW to 75 kW



MS Series 30 kW, 45 kW, and 60 kW Models

Product Name:	MS Series
Number of Models:	80
Power Levels:	30 kW, 45 kW, 60 kW, and 75 kW
Voltage Range:	Models from 0-5 Vdc to 0-4000 Vdc
Current Range:	Models from 0-7.2 Adc to 0-4500 Adc
Enclosure	Floor-Standing Cabinet


Overview

Magna-Power Electronics MS Series is built on the same power processing modules as the TS Series IV, only packaged in a floor-standing cabinet and expanding into higher power levels. The available MS Series models covers a very wide output range, spanning from voltage levels up to 4000 Vdc (floating) and current levels up to 4500 Adc. Models 30 kW to 60 kW are available in a 38.5" high cabinet, while 75 kW models are available in a 49" high chassis. In addition, there are several special low voltage high current models (Page 23), enabling a more cost-effective solution for these requirements.

All MS Series power supplies come standard with isolated 37-pin external I/O, RS232, Remote Interface Software, IVI drivers for integration into a variety of programming environment. Three front panel types are available (Page 22) for maximum application flexibility. The A Version provides front panel control and calibration, start and stop buttons, and a digital display for voltage and current. The D Version front panel adds a 10-key digital front panel entry, memory sequencing, and modulation capabilities for non-linear output profile emulation.

Available Options

- High Isolation Output (+ISO)
- High Slew Rate Output (+HS)
- IEEE-488 GPIB Interface (+GPIB)
- LXI TCP/IP Ethernet Interface (+LXI)
- Photovoltaic Power Profile Emulation (+PPPE)
- RS-485DSS Interface (External) (+RS485)
- UID47: Universal Interface Device (+UID)
- USB Edgeport Interface (External) (+USB)
- Water Cooling (+WC)

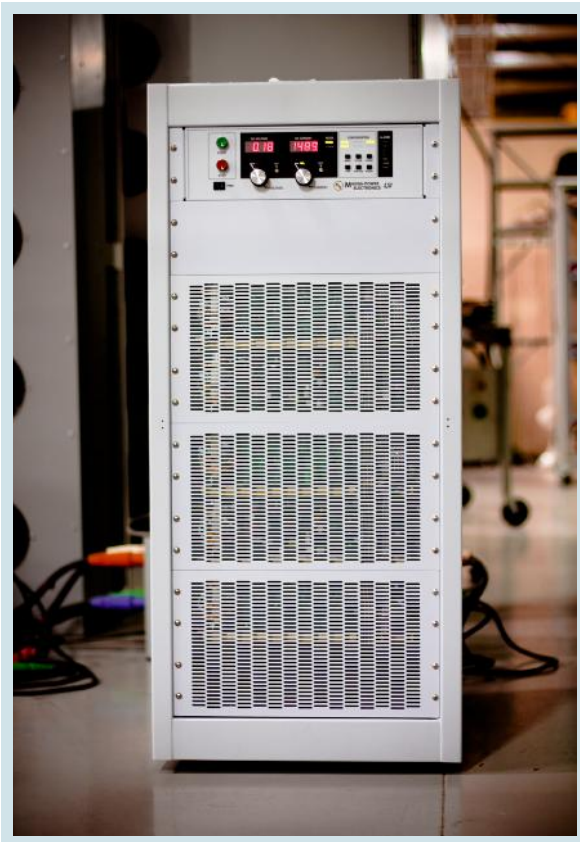

MS Series IV 75 kW Model



Floor-Standing High-Power DC Supplies

MS Series Specifications

Input Specifications

Nominal Voltage	208 Vac, 3 Φ (operating range 187 - 229 Vac)
3 phase, 3 wire + ground	240 Vac, 3 Φ (operating range 216 - 264 Vac) 380 Vac, 3 Φ (operating range 342 - 418 Vac) 415 Vac, 3 Φ (operating range 373 - 456 Vac) 440 Vac, 3 Φ (operating range 396 - 484 Vac) 480 Vac, 3 Φ (operating range 432 - 528 Vac)

Frequency 50 Hz - 60 Hz (operating range 45 - 66 Hz)

Power Factor > 0.92 at maximum power for 3 Φ units

Output Specifications

Ripple (See Models Chart)

Line Regulation Voltage Mode: $\pm 0.004\%$ of full scale
Current Mode: $\pm 0.02\%$ of full scale

Load Regulation Voltage Mode: $\pm 0.01\%$ of full scale
Current Mode: $\pm 0.04\%$ of full scale

Load Transient Response 2 ms to recover within $\pm 1\%$ of full scale output, with a 50% to 100% or 100% to 50% step load change

Efficiency $\geq 86\%$ at full load (See Model Charts)

Stability $\pm 0.10\%$ for 8 hrs. after 30 min. warmup

Isolation User inputs and outputs: referenced to earth ground.

Maximum input voltage to ground: ± 2500 Vac.

Maximum output voltage to ground:
 ± 1000 Vdc for models less than or equal to 1000 Vdc
 $\pm (2000 \text{ Vdc} + V_o/2)$ for models greater than 1000 Vdc or with High Isolation Option (+ISO) where V_o is the unit's output voltage maximum

Maximum Slew Rate Standard Models:
100 ms for output voltage change from 0 to 63%
100 ms for output current change from 0 to 63%

With High Slew Rate Option (+HS):
4 ms for output voltage change from 0 to 63%
8 ms for output current change from 0 to 63%

Bandwidth Standard Models:
3 Hz for remote analog voltage programming
2 Hz for remote analog current programming

With High Slew Rate Option (+HS):
60 Hz for remote analog voltage programming
45 Hz for remote analog current programming

Note: Specifications are subject to change without notice. Input specifications are line-to-line. Unless otherwise noted, input voltages and currents are specified for three-phase configurations.

Physical Specifications

Power	Size (H" x W" x D")	Weight
30 kW	38.5 x 22 x 29 (97.79 x 55.58 x 73.66 cm)	280 lbs (127.01 kg)
45 kW	38.5 x 22 x 29 (97.79 x 55.58 x 73.66 cm)	395 lbs (179.17 kg)
60 kW	38.5 x 22 x 29 (97.79 x 55.58 x 73.66 cm)	510 lbs (231.33 kg)
75 kW	49 x 22 x 29 (124.46 x 55.58 x 73.66 cm)	645 lbs (292.57 kg)

Control Specifications

Voltage Programming Accuracy $\pm 0.075\%$ of full scale voltage

OVT Programming Accuracy $\pm 0.075\%$ of full scale voltage

Current Programming Accuracy $\pm 0.075\%$ of full scale current

OCT Programming Accuracy $\pm 0.075\%$ of full scale current

Voltage Readback Accuracy $\pm 0.2\%$ of full scale voltage

Current Readback Accuracy $\pm 0.2\%$ of full scale current

External Analog Programming and Monitoring Levels 0 - 10 Vdc

External Analog Output Impedances Voltage output monitoring: 100 Ω
Current output monitoring: 100 Ω
+10 Vdc reference: 1 Ω

External Digital Programming and Monitoring Limits Input: 0 to 5 Vdc, 10 k Ω input impedance
Output: 0 to 5 Vdc, 5 mA drive capacity

Remote Sense Limits 3% maximum voltage drop from output to load

Environmental Specifications

Ambient Operating Temperature 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$


Storage Temperature -25 $^{\circ}\text{C}$ to 85 $^{\circ}\text{C}$

Humidity Relative humidity up to 95% non-condensing

Temperature Coefficient 0.04 % / $^{\circ}\text{C}$ of maximum output voltage
0.06 % / $^{\circ}\text{C}$ of maximum output current


Air Flow Side air inlet, rear exhaust

Water Cooling (+WC Option) Inlet temperature: 25 $^{\circ}\text{C}$
Flow rate (minimum): 3.0 GPM for 20 to 30 kW units and 4.5 GPM for 45-75 kW units
80 PSI maximum pressure

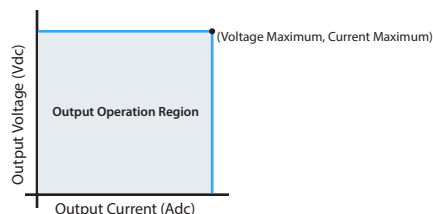

MS Series Models

Model Ordering Guide

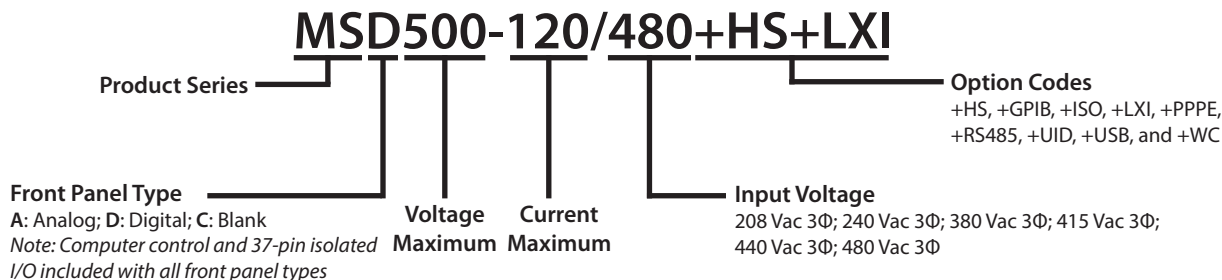

Models Chart


The following chart details the available standard MS Series models. The Current Maximum (A_{dc}) column is separated by the available power levels. To determine the appropriate model, first select your output Voltage Maximum (V_{dc}) to find appropriate row. Next, select one desired Current Maximum from the row that contains your desired Voltage Maximum. Then, construct your model number according to the model ordering guide, above. Non-standard voltage and current configurations are available.

	30 kW	45 kW	60 kW	75 kW		
Voltage Maximum (V _{dc})	Current Maximum (A _{dc})				Ripple (mVrms)	Efficiency (%)
16	1800	2700	3600	4500	35	86
20	1500	2250	3000	3750	40	86
32	900	1350	1800	2250	40	86
40	750	1125	1500	1875	40	87
50	600	900	1200	1500	50	87
80	372	558	744	930	60	87
100	300	450	600	750	60	87
125	240	360	480	600	100	87
160	186	279	372	465	120	87
200	150	225	300	375	125	87
250	120	180	240	300	130	88
375	78	117	156	195	170	88
400	72	108	144	180	180	88
500	60	90	120	150	220	88
600	48	72	96	120	250	88
800	36	54	72	90	300	88
1000	30	45	60	75	350	88
1250	24	36	48	60	375	88
1500	19.8	27.7	39.6	49.5	400	88
2000	15.0	22.5	30.0	37.5	450	88
3000	9.6	14.4	19.2	24.0	500	88
4000	7.2	10.8	14.4	18.0	550	88
	Input Current Per Phase (A _{ac})					
208/240 Vac, 3Φ	108	162	216	270		
380/415 Vac, 3Φ	60	90	120	150		
440/480 Vac, 3Φ	54	81	108	135		


Note: Ripple specified for standard models. For models with the High Slew Rate Output Option (+HS), ripple will be higher.

MS Series Diagrams

Front View

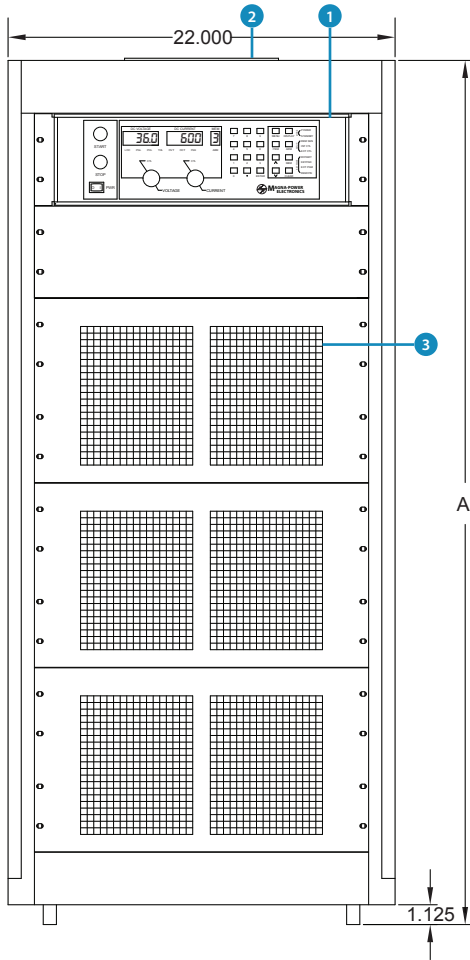

Rear View

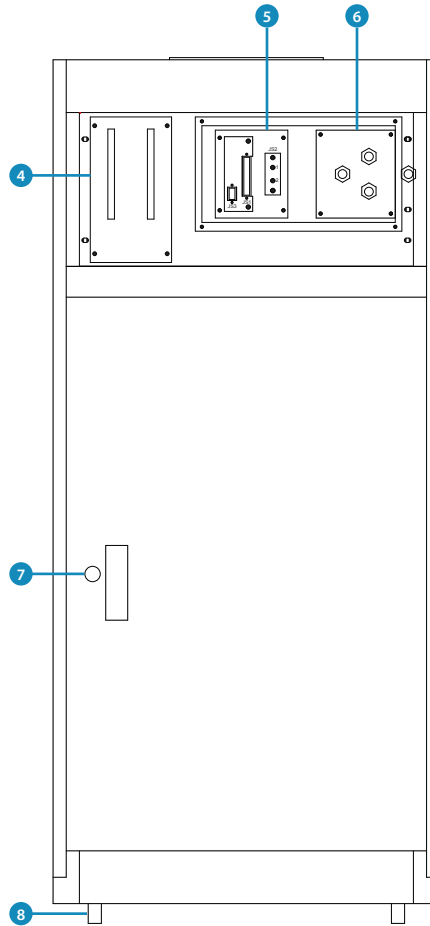

- 1 Front Panel Controller
- 2 Air Exhaust Fans
- 3 Front Air Intake (Air Cooled Models Only)
- 4 Connections for External Control
- 5 DC Output Bus (See Details Below)
- 6 Input AC Connection (4-wire) Qty (4) 3-8/16 2" Studs
- 7 Locking Door for Service Entry
- 8 Recessed Casters


Physical Specifications

Power	A (in)
30 kW	38.625
45 kW	38.625
60 kW	38.625
75 kW	49.125


Note: Additional diagrams are available for MS Series models with the Water Cooling (+WC) option.

External Controls and DC Output Bus Connections


Optional (+LXI) Interface




Optional (+GPIB) Interface




High Voltage Output Bus: Models 1250 Vdc+



Medium Voltage Output Bus: Models 80 Vdc to 1000 Vdc



Low Voltage Output Bus: Models 50 Vdc and below



MT Series: 100 kW to 2000 kW+



MT Series 100 kW and 150 kW Module



MT Series 250 kW Module

Product Name:	MT Series
Number of Models:	65
Power Levels:	100 kW to 2000 kW+
Voltage Range:	Models from 0-16 Vdc to 0-4000 Vdc
Current Range:	Models from 0-24 Adc to 0-24000 Adc
Enclosure	Floor Standing Cabinet

Overview

Magna-Power Electronics MT Series uses the same reliable current-fed power processing technology and controls as the rest of the programmable DC power supply product line, but with larger high-power modules: individual 100 kW, 150 kW and 250 kW power supplies. As an added safety measure, all MT Series units include an input AC breaker rated for full power. The independent IGBT-based MT Series units are among the largest standard switch-mode power supplies on the market, minimizing the number of switching components when comparing to smaller module sizes. Scaling in the multi-megawatts is accomplished using the UID47 device, which provides master/slave control: one power supply takes command over the remaining units, for true system operation.

250 kW modules come standard with an embedded 12-pulse harmonic neutralizer, ensuring low total harmonic distortion (THD). Even higher quality AC waveforms are available with an external additional 500 kW 24-pulse or 1000 kW 48-pulse harmonic neutralizers, designed and manufactured exclusively for Magna-Power Electronics products (Page 29).

All MT Series power supplies come standard with isolated 37-pin external I/O, RS232, Remote Interface Software, IVI drivers for integration into a variety of programming environment. Three front panel types are available (Page 22) for maximum application flexibility. The A Version provides front panel control and calibration, start and stop buttons, and a digital display for voltage and current. The D Version front panel adds a 10-key digital front panel entry, memory sequencing, and modulation capabilities for non-linear output profile emulation.

Available Options

- Harmonic Neutralizer
- High Isolation Output (+ISO)
- High Slew Rate Output (+HS)
- IEEE-488 GPIB Interface (+GPIB)
- LXI TCP/IP Ethernet Interface (+LXI)
- Photovoltaic Power Profile Emulation (+PPPE)
- RS-485DSS Interface (External) (+RS485)
- UID47: Universal Interface Device (+UID)
- USB Edgeport Interface (External) (+USB)

Innovative High-Power Switch-Mode Technology

MT Series Specifications

Input Specifications

Nominal Voltage	380 Vac, 3 Φ (operating range 342 - 418 Vac)
3 phase, 3 wire + ground	415 Vac, 3 Φ (operating range 373 - 456 Vac) 440 Vac, 3 Φ (operating range 396 - 484 Vac) 480 Vac, 3 Φ (operating range 432 - 528 Vac)
Frequency	50 Hz (operating range 45 - 55 Hz) 60 Hz (operating range 54 - 66 Hz)
Power Factor	> 92% at maximum power: 100 kW and 150 kW modules > 96% at maximum power: 250 kW modules

Output Specifications

Ripple	(See Models Chart)
Line Regulation	Voltage Mode: $\pm 0.004\%$ of full scale Current Mode: $\pm 0.02\%$ of full scale
Load Regulation	Voltage Mode: $\pm 0.01\%$ of full scale Current Mode: $\pm 0.04\%$ of full scale
Load Transient Response	2 ms to recover within $\pm 1\%$ of full scale output, with a 50% to 100% or 100% to 50% step load change
Efficiency	$\geq 90\%$ at full load (See Model Charts)
Stability	$\pm 0.10\%$ for 8 hrs. after 30 min. warmup
Isolation	User inputs and outputs: referenced to earth ground Maximum input voltage to ground: ± 2500 Vac Maximum output voltage to ground: ± 1000 Vdc for models less than or equal to 1000 Vdc ± 4000 Vdc for models greater than 1000 Vdc
Maximum Slew Rate	Standard Models: 100 ms for output voltage change from 0 to 63% 100 ms for output current change from 0 to 63% With High Slew Rate Option (+HS): 4 ms for output voltage change from 0 to 63% 8 ms for output current change from 0 to 63%
Bandwidth	Standard Models: 3 Hz for remote analog voltage programming 2 Hz for remote analog current programming With High Slew Rate Option (+HS): 60 Hz for remote analog voltage programming 45 Hz for remote analog current programming

Note: Specifications are subject to change without notice. For three-phase configurations, input specifications are line-to-line. Unless otherwise noted, input voltages and currents are specified for three-phase configurations.

Physical Specifications


Power	Size (H" x W" x D")	Weight
100 kW	62.5 x 48 x 31.5 in (158.8 x 121.9 x 80.0 cm)	1600 lbs (725.8 kg)
150 kW	62.5 x 48 x 31.5 in (158.8 x 121.9 x 80.0 cm)	2100 lbs (952.5 kg)
250 kW	62.5 x 72 x 31.5 in (158.8 x 182.9 x 80.0 cm)	3300 lbs (1496.9 kg)
500 kW	62.5 x 144 x 31.5 in (158.8 x 365.8 x 80.0 cm)	6600 lbs (2993.7 kg)
750 kW	62.5 x 216 x 31.5 in (158.8 x 548.7 x 80.0 cm)	9900 lbs (4490.6 kg)
1000 kW	62.5 x 288 x 31.5 in (158.8 x 731.6 x 80.0 cm)	13200 lbs (5987.4 kg)

Control Specifications


Voltage Programming Accuracy	$\pm 0.075\%$ of full scale voltage
OVT Programming Accuracy	$\pm 0.075\%$ of full scale voltage
Current Programming Accuracy	$\pm 0.075\%$ of full scale current
OCT Programming Accuracy	$\pm 0.075\%$ of full scale current
Voltage Readback Accuracy	$\pm 0.2\%$ of full scale voltage
Current Readback Accuracy	$\pm 0.2\%$ of full scale current
External Analog Programming and Monitoring Levels	0 - 10 Vdc
External Analog Output Impedances	Voltage output monitoring: 100 Ω Current output monitoring: 100 Ω +10 Vdc reference: 1 Ω
External Digital Programming and Monitoring Limits	Input: 0 to 5 Vdc, 10k input impedance Output: 0 to 5 Vdc, 5 mA drive capacity
Remote Sense Limits	3% maximum voltage drop from output to load
Period Programming Limits	Minimum period: 10 ms Maximum period: 9997 sec

Environmental Specifications

Ambient Operating Temperature	0 $^{\circ}$ C to 50 $^{\circ}$ C
Storage Temperature	-25 $^{\circ}$ C to 85 $^{\circ}$ C
Humidity	Relative humidity up to 95% non-condensing
Temperature Coefficient	0.04 % / $^{\circ}$ C of maximum output voltage 0.06 % / $^{\circ}$ C of maximum output current
Air Flow	Front and rear intake, top exhaust

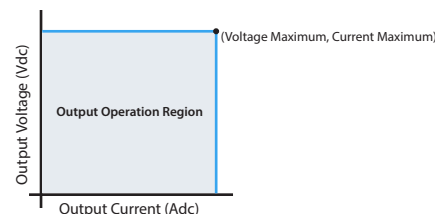

MT Series Models

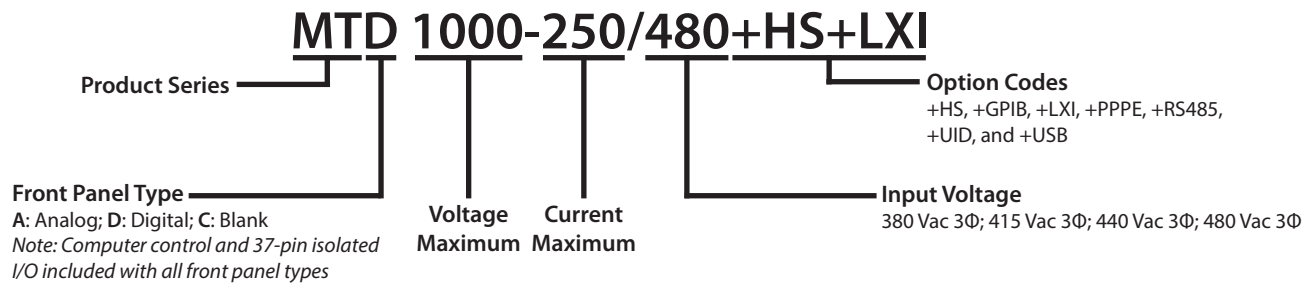

Models Chart

The following chart details the available standard MT Series models. The Current Maximum (A_{dc}) column is separated by the available power levels. To determine the appropriate model, first select your output Voltage Maximum (V_{dc}) to find appropriate row. Next, select one desired current maximum from the row that contains your desired voltage maximum. Non-standard voltage and current configurations are available. Configurations above 1000 kW are also available. Please contact your local sales partner for more information.



Voltage Maximum (V _{dc})	100 kW	150 kW	250 kW	500 kW*	750 kW*	1000 kW*	Ripple (mV _{rms})	Efficiency (%)	
	Current Maximum (A _{dc})								
16	6000	N/A	N/A	N/A	N/A	N/A	35	90	
20	5000	N/A	N/A	N/A	N/A	N/A	40	90	
25	N/A	6000	N/A	N/A	N/A	N/A	40	90	
32	3000	4500	N/A	N/A	N/A	N/A	40	90	
40	2500	3750	6000	12000	18000	24000	40	91	
50	2000	3000	5000	10000	15000	20000	50	91	
80	1250	1850	3000	6000	9000	12000	60	91	
100	1000	1500	2500	5000	7500	10000	60	91	
125	800	1200	2000	4000	6000	8000	100	91	
160	620	900	1500	3000	4500	6000	120	91	
200	500	750	1250	2500	3750	5000	125	91	
250	400	600	1000	2000	3000	4000	130	92	
375	270	400	660	1320	1980	2640	170	92	
400	250	375	625	1250	1875	2500	180	92	
500	200	300	500	1000	1500	2000	220	92	
600	160	240	400	800	1200	1600	250	92	
800	120	180	300	600	900	1200	300	92	
1000	100	150	250	500	750	1000	400	92	
1250	80	120	200	400	600	800	500	92	
1600	62	90	150	300	450	600	600	92	
2000	50	75	125	250	375	500	800	92	
2500	40	60	100	200	300	400	900	92	
3000	32	48	80	160	240	320	1000	92	
4000	24	36	60	120	180	240	1100	92	
	Input Current Per Phase (A_{ac})								
380/415 Vac, 3Φ	191	287	478	956	1434	1912			
440/480 Vac, 3Φ	165	248	413	826	1239	1652			

Note: Power levels marked with an asterisk (*) and above 1000 kW are achieved by master/slave paralleling 250 kW modules. Ripple specified for standard models. For models with the High Slew Rate Output Option (+HS), refer to the table on the option page.

MT Series VI Models

Front View* (100 kW and 150 kW)



Front View (250 kW)

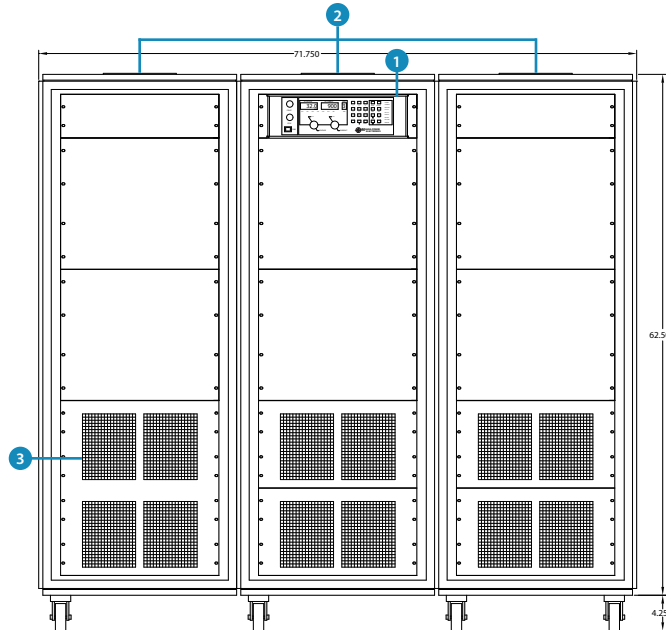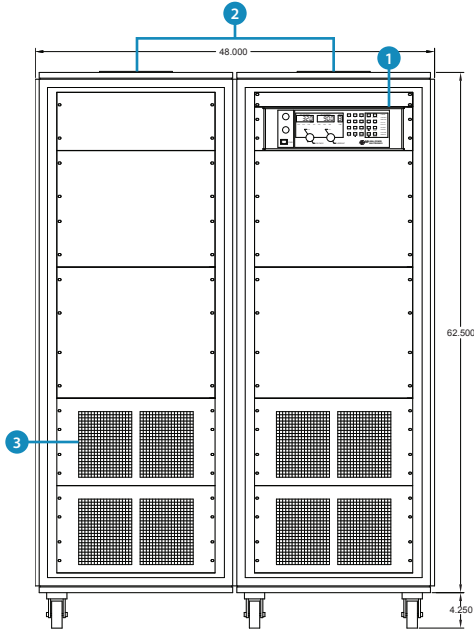

- 1 Front Panel Controller
- 2 Air Exhaust Fans
- 3 Air Intake
- 4 Connections for External Control
- 5 DC Output Bus (See Details Below)
- 6 Input AC Breaker
- 7 Input AC Power Entry Qty (4) 3/8-16 1.5" Studs

Rear View (100 kW and 150 kW)


Rear View (250 kW)

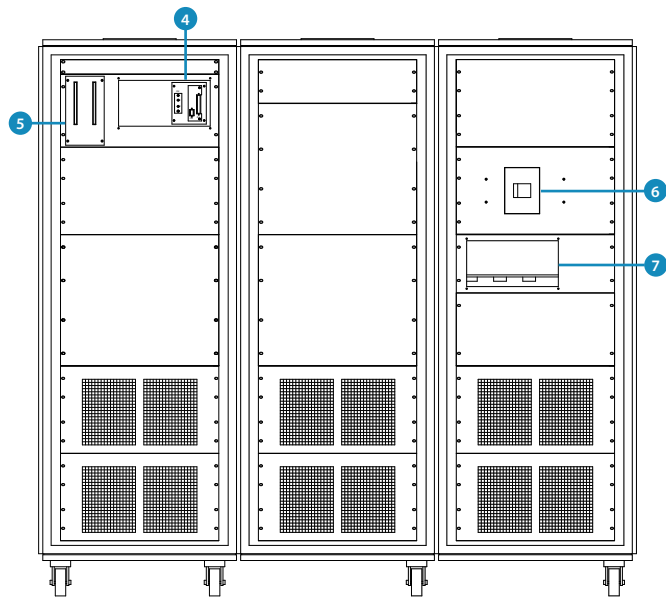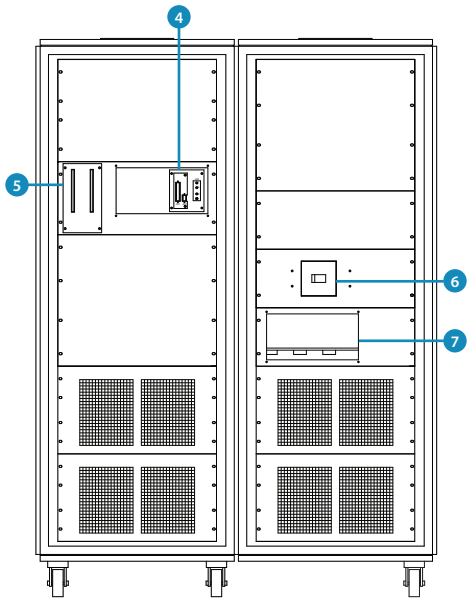


* Note: 150 kW model pictured in diagram. 100 kW models will have the front panel on the left side.

External Controls and DC Output Bus Connections


Optional (+LXI) Interface




Optional (+GPIB) Interface




High Voltage Output Bus:
Models 1250 Vdc+



Medium Voltage Output Bus:
Models 80 Vdc to 1000 Vdc



Low Voltage Output Bus:
Models 50 Vdc and below




Front Panel Types (TS/MS/MT Series)

This section details the various front panel types available for the TS Series, MS Series, and MT Series power supplies. For the XR Series front panels, refer to its diagram page.

A Version Front Panel


The A Version front panel provides a digital display with rotary front panel input, isolated 37-pin analog/digital I/O, and a RS232 computer interface.

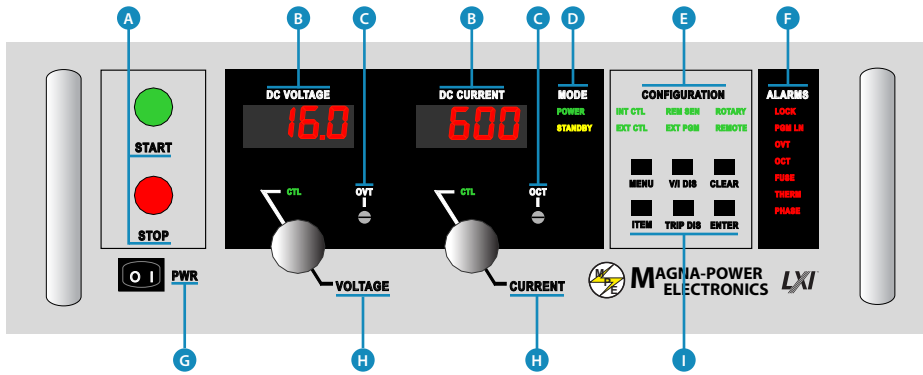

- A** Engages and disengages main power
- B** Meters display output voltage, output current, voltage set point, current set point, over voltage trip, and over current trip
- C** Over voltage trip and over current trip setting potentiometers
- D** MODE
POWER: Indicates power output
STANDBY: Indicates control power only
- E** CONFIGURATION
REM SEN: Remote sense enabled
INT CTL: Front panel start/stop/clear enabled
EXT CTL: External start/stop/clear enabled
ROTARY: Front panel control
KEYPAD: 10-digit numeric keypad control
EXT PGM: External voltage/current control
REMOTE: Computer control
- F** DIAGNOSTIC ALARMS
LOCK: Interlock
PGM LN: External input voltage beyond limits
OVT: Over-voltage protection has tripped
OCT: Over-current protection has tripped
THERM: Indicates over-temperature condition
PHASE: Indicates under-voltage AC input
FSE: Warns that a fuse has cleared
ARM: Indicates power supply is ready for or operating in auto-sequencing

D Version Front Panel

In addition to the features of the A Version front panel, the D Version front panel provides digital 10-key entry, auto-sequencing with memory capability, and modulation for non-linear power profile emulation.

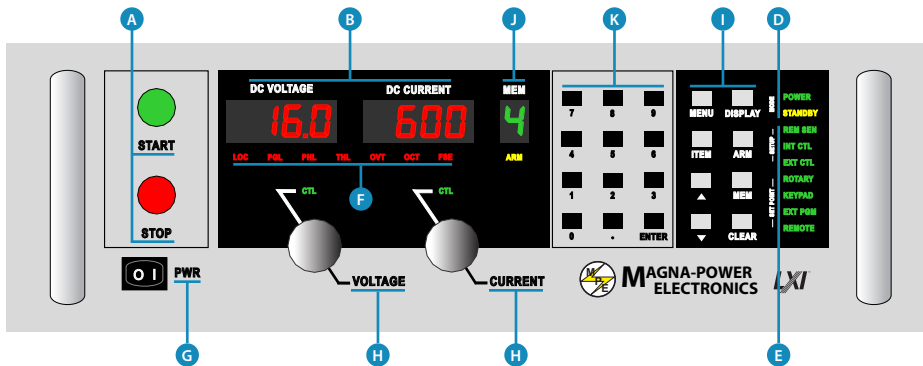

- G** Power switch energizes control circuits without engaging main power
- H** Stepless rotary knob to set voltage/current
- I** FUNCTION KEYS
MENU: Selects function
ITEM: Selects item within function
V/I DIS: Displays voltage/current settings
TRIP DIS: Displays OVT and OCT settings
CLEAR: Clears setting or resets fault
ENTER: Selects item
MEM: Sets the memory location
- J** Memory location indicator, used for auto-sequencing applications
- K** Digital input keypad

C Version Front Panel

The C Version front panel is blank, providing on a switch to enable control power. All control must be performed by the provided isolated 37-pin analog/digital I/O or through a computer interface.



Low Voltage High Current Units

Magna-Power Electronics offers a range of standard low voltage high current units based on TS Series IV and MS Series IV that do not fit in these series' standard power envelopes. All of the product options are available for these models.

Model	Voltage Maximum (Vdc)	Current Maximum (Adc)	Power (kW)	Ripple (mVrms)	Efficiency (%)	Size	Input Current (Aac)		
							208/240 Vac	380/415 Vac	440/480 Vac
TS5-1800	5	1800	9.0	50	86	6U	38	22	18
TS8-1200	8	1200	9.6	40	86	6U	38	22	18
TS10-1000	10	1000	10.0	40	86	6U	38	22	18
TS5-2700	5	2700	13.5	50	86	9U	57	33	27
TSA10-1800	10	1800	18.0	40	86	6U	72	42	36
TSA10-2700	10	2700	27.0	40	86	9U	108	63	48
MS5-2700	5	2700	13.5	50	86	18U Cabinet	57	30	27
MS5-3600	5	3600	18.0	50	86	18U Cabinet	76	40	36
MS5-4500	5	4500	22.5	50	86	30U Cabinet	95	50	45
MS10-2700	10	2700	27.0	40	86	18U Cabinet	108	62	54
MS10-3600	10	3600	36.0	40	86	18U Cabinet	144	84	72
MS10-4500	10	4500	45.0	40	86	30U Cabinet	180	106	90

Photovoltaic Power Profile Emulation (PPPE)

Introduction

The Photovoltaic Power Profile Emulation (PPPE) software automatically calculates solar array voltage and current profiles based on user-defined parameters. These profiles can be sequentially sent to a Magna-Power Electronics power supply, which will emulate defined characteristics. The user can define a limitless number of profiles to be emulated and sequenced over a given time period.


Design and production validation for photovoltaic connected electronics requires a photovoltaic emulating power source with flexible output characteristics. Inverters and specialized DC-DC converters employ maximum power point tracking (MPPT) control algorithms to maximize utilization of nonlinear energy sources, such as solar panels and wind turbines. For development and manufacturing, using photovoltaic arrays for validation is costly with uncontrolled source characteristics. By utilizing a power supply with user-programmable output characteristics, the user can evaluate the full range of power conditions.

After the profile is defined, it can be transferred to the power supply for either static or dynamic emulation. A time dependent parameter defines how long the power supply should emulate that profile before loading the next profile in the sequence.

Modeling and Operation

A profile is a voltage/current curve that the power supply's output should emulate. There are three methods to generate a power profile in the PPPE software:

- **Automatic, based on solar array parameters**
The user selects the desired solar panel technology, nominal temperature, irradiance, voltage and current values. Each V-I profile is then defined only by new temperature and irradiance values. The rest of the parameters: maximum power point (V_{mp} , I_{mp}), open circuit voltage (V_{oc}), and short circuit current (I_{sc}); are all calculated automatically in accordance with the EN50530 standard.
- **Automatic, based on 4-parameters**
The user defines the maximum power point (V_{mp} , I_{mp}), open circuit voltage (V_{oc}), and short circuit current (I_{sc}). The profile is then generated based on these parameters.
- **Manual**
The user defines up to 50 current and voltage points for the power supply to emulate. The power supply performs a piecewise linear approximation between points to provide a smooth output curve.

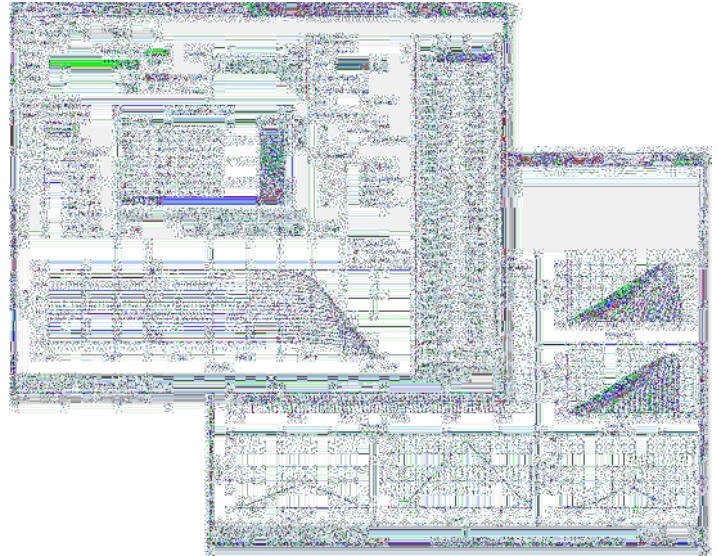

Magna-Power Electronics Photovoltaic Power Profile Emulation (PPPE) software: main programming window (foreground); Viewer window (background)

Key Features:

A profile is a voltage/current curve that the power supply's output should emulate. There are three methods to generate a power profile in the PPPE software:

- Automatic voltage current profile calculation from reference parameters
- Autosequencing through power profiles, at user-defined rate
- Graphical profile view and real-time output with advanced graphical viewer panel
- Compatible with Magna-Power Electronics programmable DC power supplies including the:
 - SL Series (1.5 kW - 4 kW)
 - XR Series (2 kW - 10 kW)
 - TS Series (5 kW - 45 kW)
 - MS Series (30 kW - 75 kW)
 - MT Series (100 kW - 2000 kW+)
- EN50530 V-I curve generation model
- Curve interpolation for smooth transitions
- SCPI command export for solar emulation functionality in LabVIEW
- Data logging
- Curve import and export




Advanced Solar Array Emulation

Advanced Features

Magna-Power Electronics worked closely with solar inverter manufacturers to refine the PPPE feature-set. Some of the key advanced PPPE features are as follows:

- EN50530 Modeling**
 The European EN50530 standard provides a new algorithm for proper solar array modeling. PPPE 2.0 incorporates this model, furthermore allowing the selection of thin film or polycrystalline silicon parameters. Defining a curve is as simple as specifying desired open-circuit voltage, short-circuit current, and maximum power point. Alternatively, manual parameters can be entered for more customized modeling or profile importing from an external file.
- Live Output Viewer**
 A new live output viewer provides six graphs of instantaneous output parameters versus time. This data allows the user to visualize fluctuations in voltage, current, and power over time.
- Curve Interpolation**
 An interpolation function was added to automatically generate transitional curves. This functionality enables smooth transitions from one curve to another over a user-defined period of time.
- Data Logging**
 Customizable data logging functionality was added, allowing for report generation and data analysis using external tools. Data is exported to a comma-delimited (.csv) file.
- Command Export**
 Leverage the ease of profile generation in PPPE and export the generated SCPI commands for integration into a separate programming environment, such as LabVIEW/LabWindows.

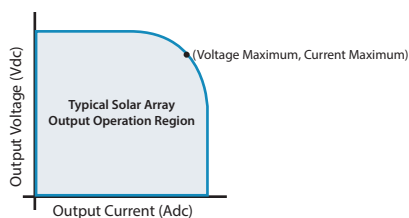


Specifications

Specifications below are related to the PPPE software only. For data on the power supplies, reference the specifications for the individual series: SL Series, XR Series, TS Series, MS Series, and MT Series.

PPPE Specifications	
Bandwidth	With High Slew Rate Output (+HS) Option: 15 Hz Standard Models: 2 Hz
Communication Protocols Supported	RS232, LXI TCP/IP Ethernet, IEEE 488 GPIB, USB
Minimum Time Between Sequential Profiles	2 sec
Number of Profile Sequences	Unlimited
Minimum Voc and Isc	10% of the power supply's rated voltage and current
Maximum Profile Slope	$(\Delta I / \Delta V) \times (I_{max} / V_{max}) \leq -0.05$
Instantaneous Load Change to Short-circuit	Supported with High Slew Rate Output (+HS) option

Note: Specifications are subject to change without notice

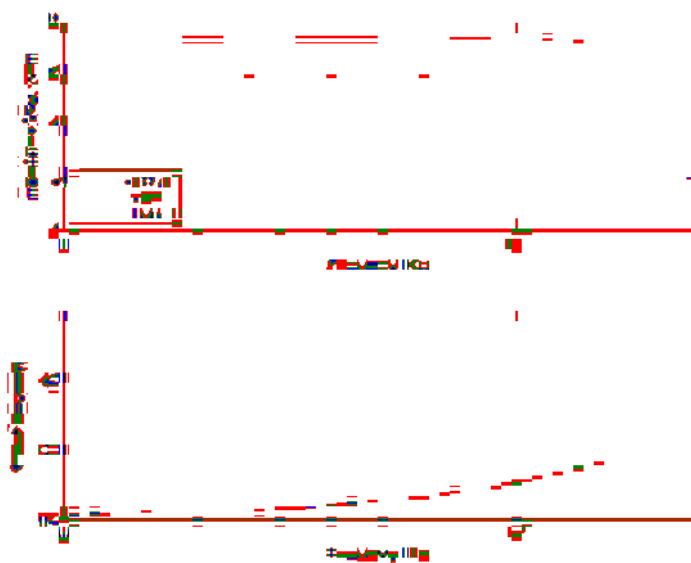

Voltage error as a function of operating bandwidth during solar array emulation

Product Options

Performance and Packaging Options

Magna-Power Electronics programmable DC power supplies are designed to be as versatile and expandable as possible. A variety of options are available allowing the product to deviate from its standard specifications. This section provides an overview of the available performance and packaging options and products supported.

Cabinet and Integration

Option Code:	+CAB1, +CAB2, +CAB3
Products Supported:	SL Series, XR Series, TS Series

Cabinet and integration services are offered for the rack-mount programmable DC power supply products. Cabinets are supplied with fans rated to installed products. Key features of the cabinet and integration option are as follows:

- Reliable Premier Metal (+CAB1, +CAB2) and Hoffman® (+CAB3) cabinets
- Casters installed, including (2) locking casters
- Special circuitry for product integration with cabinet fans
- Installation and testing as a complete system

Cabinet and Integration Specifications		
Cabinet Option	Dimensions (H"xW"xD")	Rack Units
Cabinet 1 (+CAB1)	38.75" x 22" x 31"	18U
Cabinet 2 (+CAB2)	49.25" x 22" x 31"	24U
Cabinet 3 (+CAB3)	67" x 24" x 31.5"	30U

High Slew Rate Output

Option Code:	+HS
Products Supported:	SL Series, XR Series, TS Series, MS Series, MT Series

The high slew rate option solves several limitations inherent in switching power supply design. Rapid voltage transitions require internal electronics to supply the energy to charge and discharge output capacitors. Peak currents internal to the power supply define slew rate; utilizing less capacitance enables voltage transitions in shorter time periods. Additionally, less capacitance reduces requirements for discharge demands during open circuit conditions.

The standard output stage Magna-Power Electronics power supplies has been designed to provide the lowest possible output ripple voltage within the constraints of available components, size, and cost. Part of the output stage consists of a bank of aluminum electrolytic capacitors which has the desired electrical properties to provide this function. These components require bleed resistors to discharge any voltage when the power supply has no load and is disabled. While the presence of these components and the resulting performance are normally industry accepted, there are applications where lower output capacitance is extremely desirable and higher ripple voltage is acceptable. To meet this need, a high-slew rate option is available which has an output stage consisting of low capacitance film and aluminum electrolytic capacitors. Applications for the high-slew rate option include battery charging, photovoltaic emulation, power waveform generation, and medium speed power pulsing. These applications all benefit from higher bandwidth and in many cases, can tolerate the increased ripple voltage of this option.

Slew Rate Specifications		
	Slew rate standard	Slew rate with +HS option
Voltage	100 ms	4 ms
Current	100 ms	8 ms

High Isolation Output

Option Code:	+ISO
Products Supported:	TS Series, MS Series, MT Series

Certain applications require floating the output voltage to values beyond the power supply's standard isolation rating. Magna-Power Electronics High Isolation Output option (+ISO) enables any TS Series, MS Series, or MT Series model with a peak output voltage rating of 250 Vdc through 1000 Vdc to be rated for a higher voltage output isolation. Improved isolation is achieved by a novel output stage with improved controller isolation. In addition to being able to float the power supply to a higher output voltage, this option also enables lower voltage units to connected series up to the higher isolation rating.

The table below provides the output isolation rating for all available configurations, where V_o is the unit's rated maximum output voltage.

Output Isolation Specifications			
Product	Isolation, models 1000 Vdc and below	Isolation, models 1000 Vdc and below with +ISO option	Isolation, model above 1000 Vdc
SL Series	1000 Vdc	N/A	N/A
XR Series	1000 Vdc	N/A	N/A
TS Series	1000 Vdc	$\pm (2000 \text{ Vdc} + V_o/2)$	$\pm (2000 \text{ Vdc} + V_o/2)$
MS Series	1000 Vdc	$\pm (2000 \text{ Vdc} + V_o/2)$	$\pm (2000 \text{ Vdc} + V_o/2)$
MT Series	1000 Vdc	4000 Vdc	4000 Vdc

UID47: Universal Interface Device

Option Code:	+UID
Products Supported:	SL Series, XR Series, TS Series, MS Series, MT Series

Magna-Power Electronics UID47 is a general purpose device for connection to Magna-Power Electronics' power supplies. The device contains the necessary circuitry for configuring power supplies for master/slave parallel or series operation.

Master/slave parallel operation allows two or more power supplies to equally share output current when connected together. Master/slave series operation allows two or more power supplies to equally share output voltage when connected together. In either operation mode, the master unit will command the slave units to the proper voltage and current. Each unit will display its own individual voltage and current. Installation requires setting jumpers, placing included 37-conductor cables between the UID47 and power supplies, and wiring the power supply outputs in either parallel or series.

The UID47 can be used as an interface for connecting control and monitoring lines to external circuitry. It also contains an area on the printed circuit board for interconnecting wires and placing components for specific user applications.

Key features of the UID47 option are as follows:

- Compatible with all Magna-Power Electronics power supplies
- Interface for series and parallel master/slave operation
- User configurable screw terminal connector
- Pad area for custom circuitry
- (2) 6-foot 37-pin cables included



Water Cooling

Option Code:	+WC
Products Supported:	TS Series, MS Series

Water cooling is available for Magna-Power Electronics TS Series and MS Series power supplies typically for use in corrosive environments, such as electroplating applications or in densely packaged system cabinets, where heat removal by air cooling presents a problem.

Water cooling is accomplished with chill plates and an integrated central heat exchanger. The chill plates provides a thermal conduction path for heat sensitive components and the central heat exchanger removes heat from air internal to the enclosure. Water cooled TS Series models have enclosures without vent holes and are basically sealed the unit from the environment. An internal solenoid valve enables water flow when the chill plate reaches 60 degrees celcius. Operation of the solenoid prevents internal condensation.

	Water Cooling Specifications		
	5 kW - 15 kW Models	20 kW to 30 kW Models	45 kW to 75 kW Models
Inlet Coolant Temperature	25°C	25°C max	25°C max
Flow Rate (Min)	1.5 GPM	3.0 GPM	4.5 GPM
Pressure (Max)	80 psi	80 psi	80 psi
Inlet/Outlet Pipe Size	1/4" NPT male	1/2" NPT male	1/2" NPT male

Each 15 kW module has a 1/4" NPT female inlet and outlet for water flow. For models greater than 15 kW, external plumbing interconnects power supply modules. A minimum of 2.50" is recommended behind the enclosure for this hardware and user connections. For systems requiring more than one power supply, plumbing connections must be paralleled; that is, water should not flow from one power supply into another.

Product Options

Communication Interface Options

All Magna-Power Electronics programmable DC power supplies come standard with RS232 serial interface and 37-pin isolated analog/digital I/O. Additional available interface options are available, as detailed in this section.

IEEE-488 GPIB

Option Code:	+GPIB
Products Supported:	SL Series, XR Series, TS Series, MS Series, MT Series

The IEEE-488 interface, sometimes called the General Purpose Interface Bus (GPIB), is a general purpose digital interface system that can be used to transfer data between two or more devices. It is particularly well-suited for interconnecting computers and instruments. Some of its key features are:

- Up to 15 devices may be connected to one bus
- Total bus length may be up to 20 m and the distance between devices may be up to 2 m
- Communication is digital (as opposed to analog) and messages are sent one byte (8 bits) at a time
- Message transactions are hardware handshaked
- Data rates may be up to 1 Mbyte/sec

LXI TCP/IP Ethernet

Option Code:	+LXI
Products Supported:	SL Series, XR Series, TS Series, MS Series, MT Series

Certified to the LXI Standard (Class C), the TCP/IP Ethernet option includes an embedded web-server, allowing web browser power supply control and monitoring from virtually anywhere. LXI is an instrumentation platform based on industry standard Ethernet technology designed to provide modularity, flexibility, and performance to small- and medium-sized systems.

LXI's advantages are exemplified in its compact, flexible package providing high-speed I/O and reliable measurements. The Magna-Power Electronics LXI TCP/IP Ethernet option includes an embedded web-server, allowing web browser power supply control and monitoring from virtually anywhere.

USB Edgeport

Option Code:	+USB
Products Supported:	SL Series, XR Series, TS Series, MS Series, MT Series

Edgeport USB-to-serial converters offer instant I/O expansion for peripheral device connectivity. An out-of-the-box (external) alternative to PCI cards, Edgeport makes it easy to add serial port to a PC, server or thin client in minutes without opening the chassis, reconfiguring or rebooting the system.

The USB Edgeport device plugs directly into the back of the power supply, creating a seamless USB interface. Feature-rich design, reliability and unmatched operating system support make Edgeport USB-to-serial converters ideal for mission-critical enterprise applications. USB cable included along with associated drivers on the Magna-Power Electronics software CD.

RS-485DSS

Option Code:	+RS485
Products Supported:	SL Series, XR Series, TS Series, MS Series, MT Series

The 485DSS allows non-addressable, "dumb" RS-232 devices to be connected on an addressable RS-485 network. The master node controls all communications to connected devices. By distributing the switching intelligence along the RS-485 network, wiring cost savings are substantial compared to a single switched "star" configuration.

Devices can either be polled by the master node or request access to the bus through a RS-232 handshake line. This provides a versatile system for interconnecting devices that are designed for point to point communications. Because the units communicate using standard RS-485 signals, RS-232 devices can form their own network or be added to an existing system. Up to 32 nodes at up to 4000 feet can be on one bus without a repeater, and the 485DSS's addressing scheme allows up to 256 units on a single network with repeaters.

Harmonic Neutralizer

Magna-Power Electronics Harmonic Neutralizers eliminate families of harmonic components by multiplying the number of input phases with specially wound magnetic components. These transformers, in combination with equally loaded, high-power DC power supplies, offer a cost-effective solution to maintaining power quality at acceptable levels. Harmonic Neutralizers are packaged in cabinetry designed to be integrated with multiple MT Series VI installations.

Why Neutralize Harmonics?

Input current harmonics are a by-product of nearly all power supplies. Power can only be delivered to the load if the frequency and phase of the voltage and current match. For a three phase power supply using a three phase input rectifier, the input current has a theoretical spectrum of $6n \pm 1$ where n is an integer incrementing from 1; this is known as a 6-pulse waveform. This means that a power supply with a three phase input rectifier will produce input currents at 1, 5, 7, 11, 13, 17, 19 ... times the fundamental frequency. The theoretical magnitude decays as the reciprocal of the harmonic component. The 5th and 7th harmonic components have magnitudes of 20% and 14% of the fundamental component, respectively.


Harmonics currents in power systems can find unusual paths and can cause problems if the magnitude is significant and there are loads sensitive to harmonic frequencies. For example, lighting ballasts have series connected capacitors and inductors which can be excited by harmonic currents. IEEE has introduced standard, IEEE 519, which defines recommended limits. Implementing this standard requires a knowledge of the power system and other loads producing harmonics. Unfortunately, the standard can allow the same power supply to possibly exceed limits in one application and not in another. In the same respect, a power supply may or may not cause a harmonic related problem with or without meeting IEEE 519. The best solution to minimize the risk of a harmonic problem is to eliminate the harmonic current at the source.

Models and Ratings


Model	Power Modules	Power (kW)	Pulse No.	Weight (lbs)	Size (H" x W" x D")
HN200-12	2 x 100 kW	200	12	935	62.5 x 24 x 31.5
HN300-12	2 x 150 kW	300	12	1602	62.5 x 24 x 31.5
HN400-12	4 x 100 kW	400	12	1670	62.5 x 24 x 31.5
HN450-18	3 x 150 kW	450	18	1982	62.5 x 24 x 31.5
HN500-24	2 x 250 kW	500	24	3003	62.5 x 24 x 31.5
HN600-12	4 x 150 kW	600	12	3003	62.5 x 24 x 31.5
HN1000-48	4 x 250 kW	1000	48	9012	62.5 x 72 x 31.5

AC Harmonic Waveforms

The following figures are representative of expected AC current waveforms for the various pulses available from Magna-Power Electronics power supplies. As standard, models 2 kW through 150 kW produce 6-pulse waveforms, while 250 kW models produce 12-pulse waveforms. Magna-Power Electronics Harmonic Neutralizers suppress families of harmonics by increasing the number of power phases. It can be used when multiple power supplies are used in series or parallel and are equally loaded. Harmonic Neutralizers can produce 12-pulse, 18-pulse, 24-pulse, or 48-pulse waveforms which have harmonic current components on the order of $12n \pm 1$, $18n \pm 1$, $24n \pm 1$, or $48n \pm 1$, respectively. The following figures show the theoretical difference for waveforms with a different number of pulses. Harmonic Neutralizers are protected with appropriate sized primary-side circuit breakers.

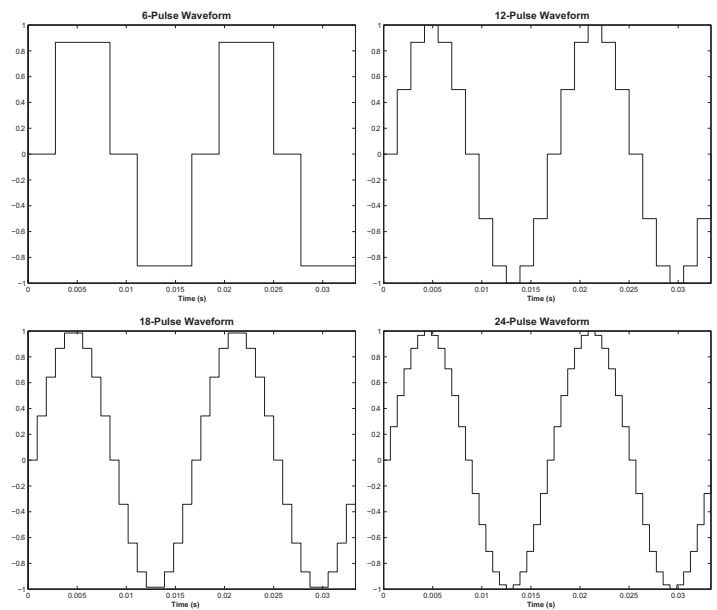


Size Diagrams

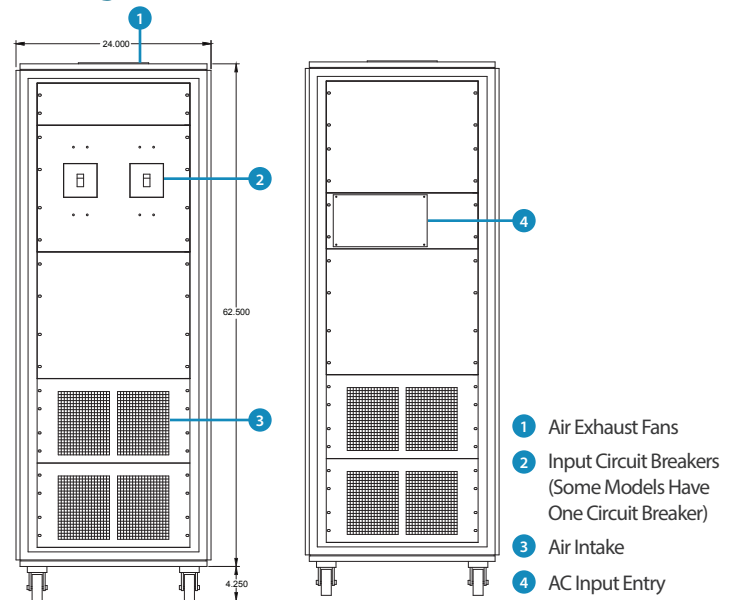


- 1 Air Exhaust Fans
- 2 Input Circuit Breakers (Some Models Have One Circuit Breaker)
- 3 Air Intake
- 4 AC Input Entry

Notes

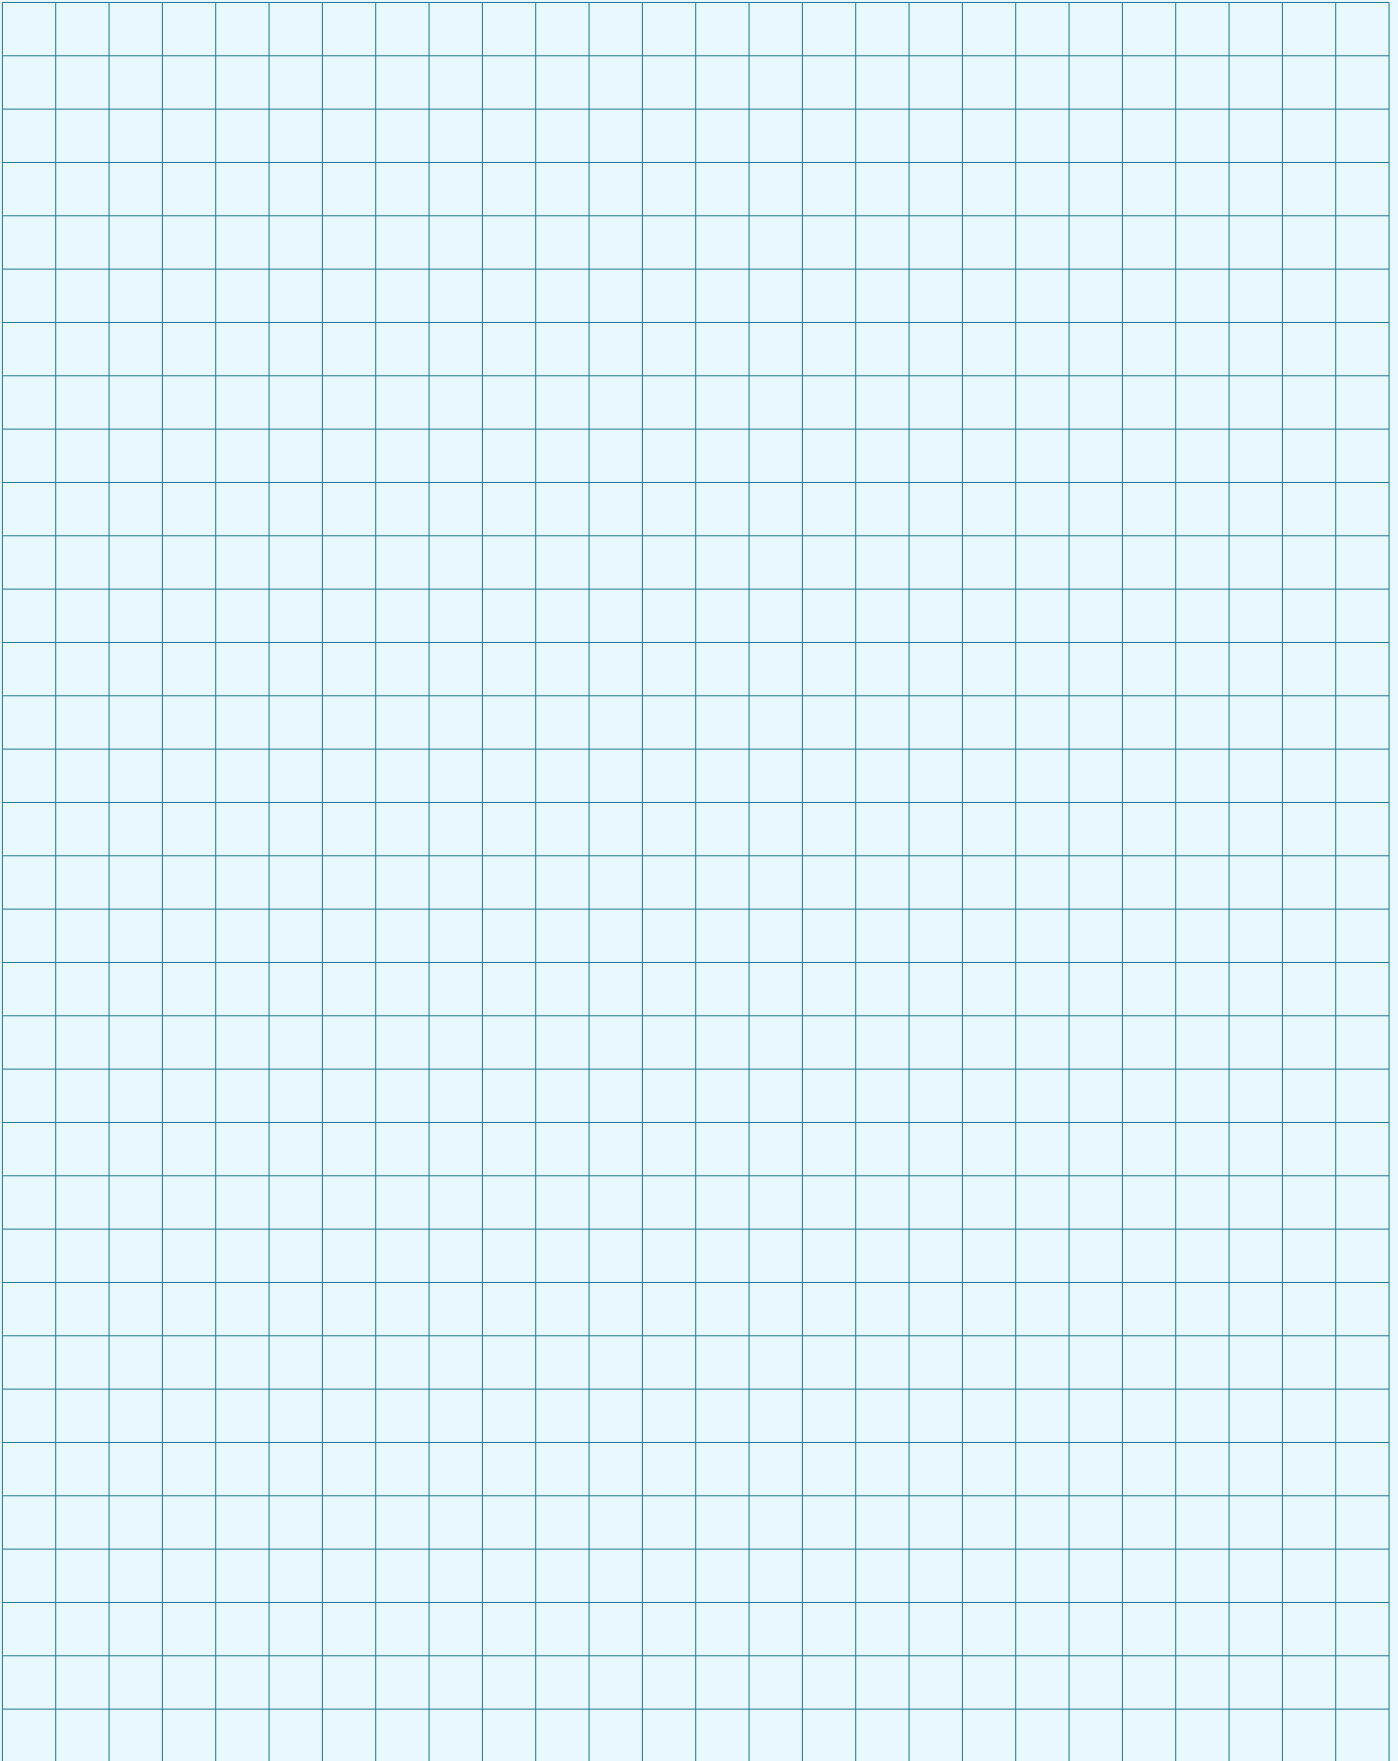

Notes

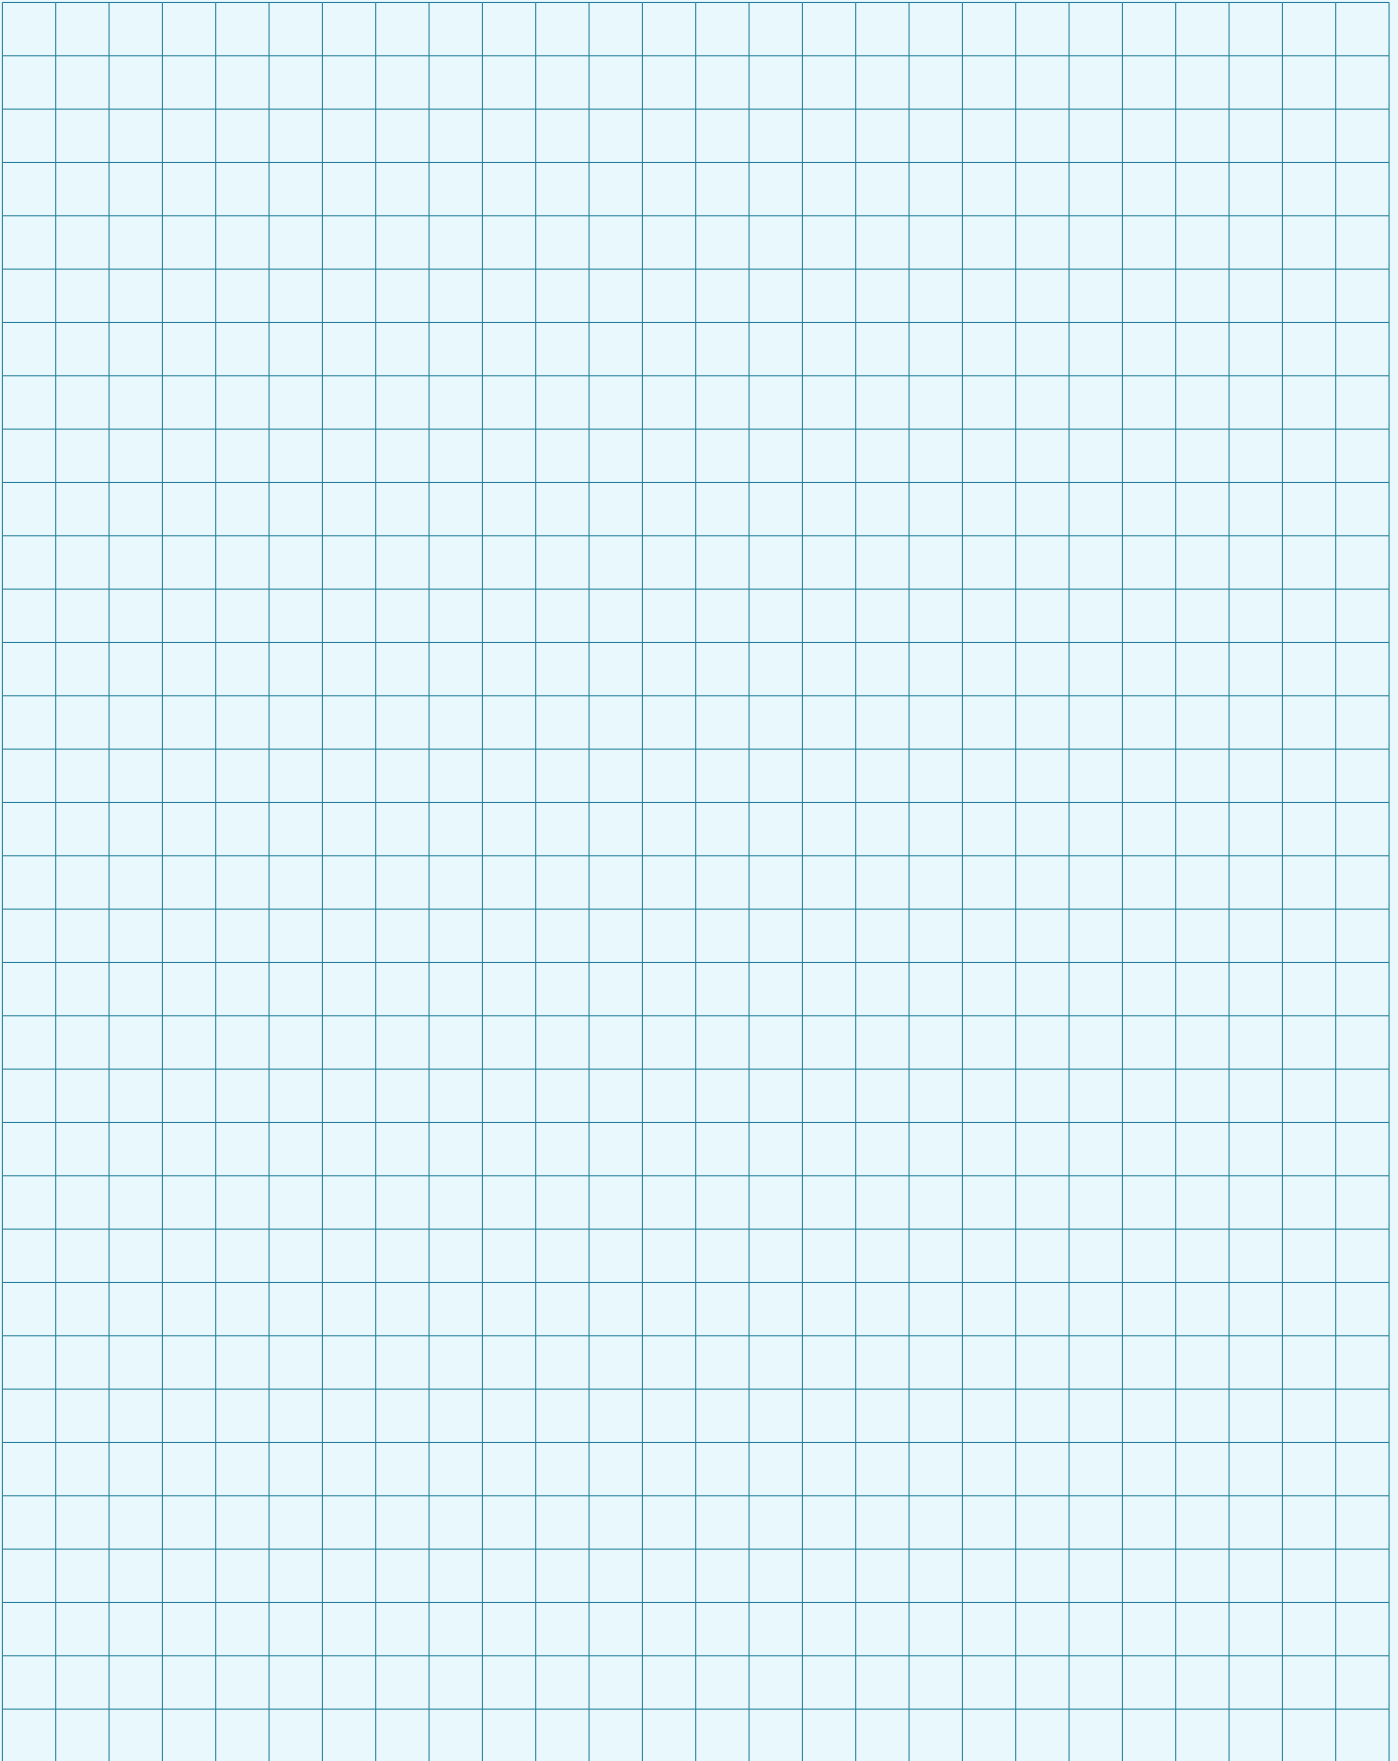

Where to Buy

Magna-Power Electronics Partners and Sales Offices

North America

Magna-Power Electronics, Inc.
39 Royal Road
Flemington, NJ 08822
United States of America

Phone: 1-908-237-2200
Email: info@magna-power.com
www.magna-power.com

Germany, Austria, Switzerland, Central and Eastern Europe

Magna-Power Electronics GmbH
Daimlerstr. 13
85521 Ottobrunn
Germany

Phone: +49-(0)89-95890293
Email: info@magna-power.de
www.magna-power.de

United Kingdom and Ireland

Magna-Power Electronics Limited
3 The Knapp, Earley
Reading, Berkshire, RG6 7DD
United Kingdom

Phone: +44 1189 663143
Email: info.uk@magna-power.com
www.magna-power.com

Distributors of Magna-Power Electronics products are located worldwide.

To find the nearest sales partner, please visit:

www.magna-power.com/contact

Magna-Power Electronics — innovative power electronics solutions for applications from industry to research

Published by
Magna-Power Electronics, Inc.
Flemington, NJ 08822 USA

© 2015 Magna-Power Electronics, Inc.
All Rights Reserved.

Visit us:
www.magna-power.com

ATTENTION

The information and specifications given in this document are subject to change without notice.

INFORMATION

For further information on technology, terms and conditions, and product prices, contact the nearest Magna-Power Electronics sales partner (www.magna-power.com/contact).