



Pentek Talon RTX SFF



**Features**

- Rugged 1/2 ATR MIL-spec chassis
- Designed for harsh mechanical and thermal environments
- Environmentally sealed
- Internally conduction-cooled
- Fully sealed for RF emissions with EMI power line filter
- MIL-STD circular connectors
- Compact and lightweight design - 22 lb (10 kg)
- Ideal for UAVs, military vehicles, aircraft pods and outdoor environments
- Capable of recording RF/IF frequencies to 2.8 GHz
- Ultra wideband recording with 3.6 GHz 12-bit A/D
- Selectable 1.8 GHz dual-channel mode
- Sustained real-time record rates up to 4 GB/s
- 12 to 28 VDC power supply
- Optional GPS receiver for precise time and position stamping
- SystemFlow API, GUI and Signal Viewer analysis tools

**General Information**

Pentek’s Talon RTX Small Form Factor (SFF) recorders provide the performance of large rackmount recorders in the smallest footprint available in Pentek’s Talon Recording System product line. Packaged in an extremely rugged 1/2 ATR form factor, these recorders provide high-performance processing, high speed data storage and large solid state storage capacity.

Optimized for SWaP (size, weight and power,) Talon RTX SFF recorders are packaged in a 1/2 ATR footprint, measuring 7.688" H x 4.880" W x 14.125" D and weighing only 22 pounds (10 kg). These recorders are capable of sustained real-time recording speeds up to 4 GB/s and can hold up to 30 TB of SSD storage.

Power consumption has been greatly reduced in this package. A standard system will draw approximately 110 W at full operation.

The Model RTX 2589 uses a Texas Instruments ADC12D1800 12-bit, 3.6 GHz A/D converter to provide ultra-wide bandwidth recording of RF/IF signals. The A/D can be configured as a single channel 3.6 GHz A/D or two 1.8 GHz A/Ds. Selectable sample rates and data packing modes allow the user to capture large swaths of the RF spectrum in real-time at sustained record rates as high as 4 GB/s.

The ADC12D1800 has a full power input bandwidth of 1.75 GHz in single-channel mode and 2.8 GHz in dual-channel mode.


It is complemented with a digital down-converter that provides selectable decimations up to 512 to improve SNR while zooming in on signals throughout the RF spectrum.

**Extremely Rugged Design**

Designed to operate in the toughest environments, the recorder chassis keeps all electronics sealed from the outside environment and removes heat by conducting to forced-air cooling channels. Designed to operate from -40° to +60° C, these recorders can operate in most thermal environments, making them ideal for UAVs, aircraft pods, tight equipment bays, military vehicles and most outdoor environments.

The sealed ½ ATR chassis uses MIL-STD circular connectors for I/O to control RF emissions while protecting the recorder’s electronics from humidity, water, dust, sand and salt fog. In addition to meeting MIL-STD 461 specifications for radiated RF emissions, conducted emission military specifications are met by design with a built-in conducted emissions filter.

Designed to handle high levels of shock and vibration, this extremely rugged chassis supports Pentek’s extensive line of I/O front-ends, providing multichannel, wide bandwidth RF recording and a variety of digital interface recording options. An optional GPS receiver provides precise time stamping of recordings and can track and record the GPS position of the system during operation. ➤

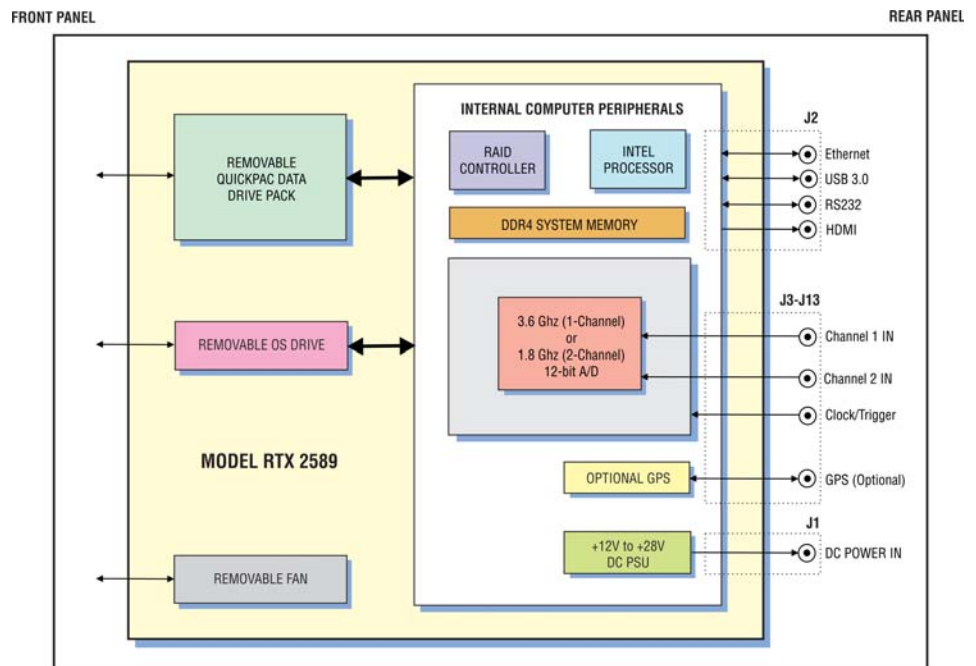

### Using QuickPacs

The Pentek QuickPacs add a valuable convenience to the RTX SFF 1/2 ATR recorder by providing the ability to quickly remove all data storage from the recorder via the front panel.

With up to 30 TB of solid state data storage capacity, QuickPacs can be easily removed from the recorder by loosening a set of captive thumb screws.

A separate Operating System drive can be removed as well, allowing the users to extract all non-volatile memory from the system in just a few seconds.

QuickPacs include a high insertion cycle connector to provide an extremely durable data storage drive for Talon Recorders.

Spare QuickPacs can replace full ones in seconds to minimize mission downtime. QuickPacs filled with mission data can be taken to the lab where data can be retrieved, post-processed and archived with a Talon offload system.



*A QuickPac removed from the Talon Recorder*



*A QuickPac in the process of being removed from the front of a Talon Recorder*



*A fan removed from the Talon Recorder*

### Sealed Chassis with Cooling Design

The Talon RTX SFF chassis seals the internal electronics from the outside environment by providing an inner plenum that is designed to extract heat from the internal electronics via conduction.

The plenum is supplemented by a removable fan that is used to pull air from the front of the chassis and exhaust it through the rear. Only the fan is exposed to the outside environment, assuring the electronics are protected in the sealed chassis.

The removable fan pulls air from the front of the chassis across heat sinks that are welded to the inner plenum of the chassis.

The welded heat sinks are attached directly to all heat generating electronics within the sealed chassis providing a conduction-cooled path to the inner plenum. This assures optimal cooling while maintaining a sealed design. The inner plenum can be replaced to provide other cooling options, such as liquid or conduction-cooling.



*A fan in the process of being removed from the back of a Talon Recorder*




*Rear Panel I/O*

### Rear Panel I/O

The Talon RTX SFF rear panel I/O provides MIL-STD circular connectors for power and computer I/O. Bulkhead mounted SMA connectors for RF signals, GPS, clocks and triggers are sealed with gaskets for moisture and RF emissions protection. Optical I/O is provided via an optional rear panel. ▶


SystemFlow Graphical User Software

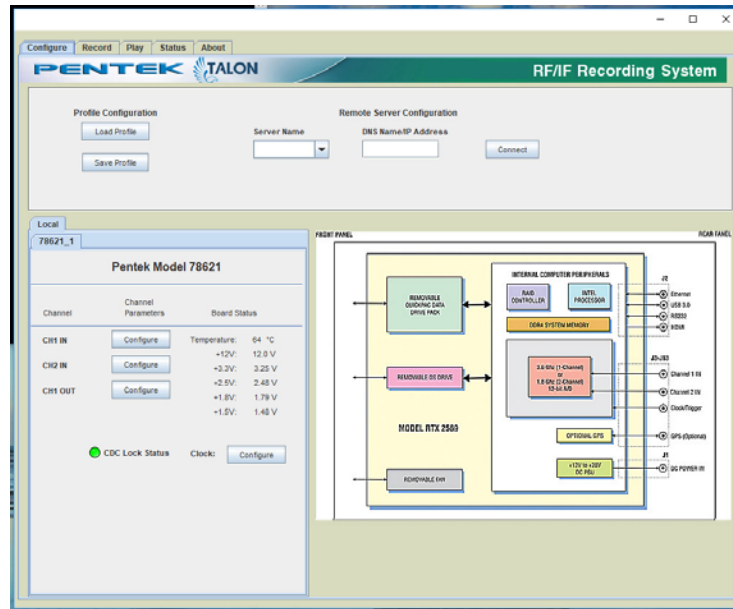

SystemFlow Main GUI

All Talon RTX SFF Recorders include the Pentek SystemFlow® recording software. SystemFlow features a Windows-based GUI (Graphical User Interface) that provides a simple means to configure and control the recorder.

SystemFlow includes signal viewing and analysis tools, that allow the user to monitor input signals prior to, during, and after a recording session. These tools include a virtual oscilloscope, a spectrum analyzer and spectrogram displays.

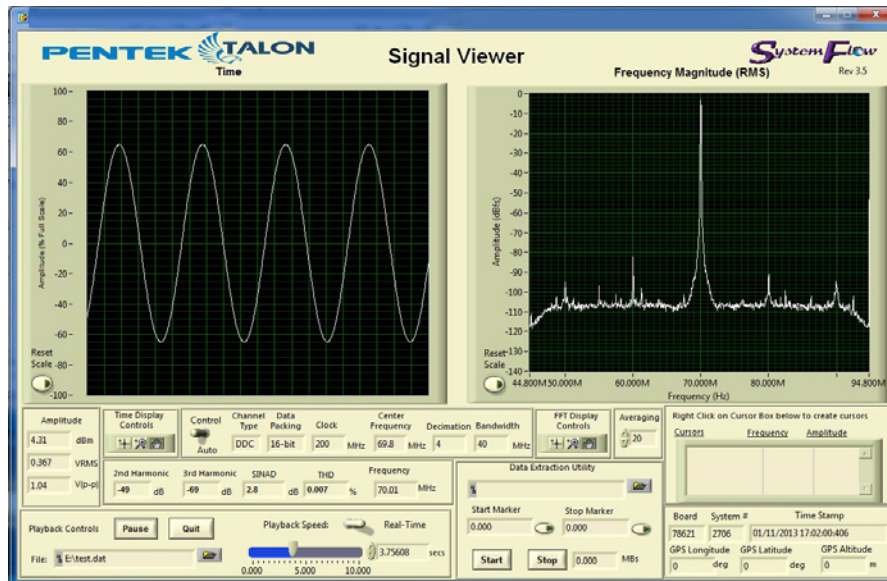

Signal Viewer

SystemFlow uses a client/server architecture to allow the real-time recording software to run on the Talon recorder independent of the control software that can run on an external computer.

System engineers can use the SystemFlow GUI to control the system remotely or develop a custom interface using the SystemFlow API (Application Programming Interface). Remote control takes place over gigabit Ethernet.

Recordings are kept simple to allow for extremely high bandwidth data storage, streaming only the raw data to disk. A simple header that holds the recording parameters is added to the beginning of the file.

An optional GPS receiver allows the user to precisely timestamp files and optionally track the recorder's position throughout a mission. The system records all data to the native NTFS file system, allowing for quick and easy access to the data from any computer. ➤

## Specifications

### Physical Characteristics

**Dimensions:** 7.688" H x 4.880" W x 14.125" D

(195 mm H x 124 mm W x 359 mm D)

**Weight:** 22 lb (10 kg)

**Storage:** One removable Quickpak  
with up to 30.72 TB total storage

**RAID Levels:** 0, 5 and 6 available  
One removable Operating System SSD  
(M.2 form factor - 250 GB standard)

#### Front Panel I/O

One removable QuickPac (Thumbscrew removable)  
One removable Operating System SSD (Thumbscrew removable)  
One removable System Fan (Thumbscrew removable)

#### Rear Panel I/O

Chassis power connector: Amphenol 2M805-002-16M12-2PA  
Mating cable power connector: Amphenol 2M805-002-16M12-2PA  
Chassis Computer I/O Connector: Amphenol 2M805-005-07M19-85SA  
Mating cable computer I/O Connector: Amphenol 2M805-002-16M19-85PA  
RF: 11x SMA (female SMA bulkhead mounted with gaskets)

#### Computer I/O

**Chassis Computer I/O Connector:** Amphenol 2M805-005-07M19-85SA  
**Signals, 1 each:** HDMI, USB 3.0, Ethernet(RJ 45), RS232

### Cooling

Conduction-cooled to inner air channel  
Removable fan inserted in air channel to push air across sealed heat sinks  
Optional direct conduction cooling and other methods available

### Power

+12 to +28 VDC (+24 VDC nominal) 110 Watts power consumption typical, 140 Watts maximum

### Analog Signal Inputs

**Connectors:** Female bulkhead SMA connectors  
**Input Type:** Transformer Coupled  
**Full-scale Input:** +2 dBm or +4 dBm into 50 ohms  
**3 dB passband:** 4.5 MHz to 3.0 GHz  
**Sampling Rate (fs):**  
**Single-channel mode:** 500 MHz to 2.8 GHz  
**Dual-channel mode:** 150 MHz to 1.8 GHz  
**Resolution:** 12 bits  
**Anti-Aliasing Filters:** External, user supplied

### A/D Converters

**Type:** Texas Instruments ADC12D1800

#### Sampling Rate (fs):

Single-Channel Dual-edge sampling: 500 MHz to 3.6 GHz  
Dual-Channel, single-edge sampling: 150 MHz to 1.8 GHz

#### Resolution:

**SNR:** Single-Channel: 55.8 dB Typ @ 125 MHz,  
50.4 dB Typ @ 1147 MHz  
Dual-Channel: 58.6 dB Typ @ 125 MHz,  
53.9 dB Typ @ 1147 MHz

**SFDR:** Single-Channel: 58.9 dBc Typ @ 125 MHz,  
56.7 dBc Typ @ 1147 MHz  
Dual-Channel: 73 dBc Typ @ 125 MHz,  
60.2 dBc Typ @ 1147 MHz

### Anti-Aliasing Filters

**Type:** External, user supplied

### Digital Downconverter

**Decimation:** 8, 16 to 512 in Single-Channel Mode, 4, 8 to 256 in Dual-Channel Mode

**IF Center Frequency Tuning:** DC to fs, 32 bits

**LO SFDR:** >120 dB

**DDC Usable Bandwidth:** 0.8\*fs/D

### Clock Sources

**Source:** selectable from onboard programmable VCXO, or external clock

**External Clock Connector:** Female bulkhead SMA connector  
**External Clock Signal Requirement:** Sine wave 0 dBm to 10 dBm full scale

### External Trigger

**External Trigger Connector:** Female bulkhead SMA  
**External Trigger Signal Requirement:** TTL

### Processor and Memory

**Processor:** Intel Core i7, 7700K, 7th Generation, Quad Core, 4.2 GHz

**DRAM:** 8 GB DDR 4, optional 16 to 32 GB

### Environmental

**Operating Temp:** -40° to +60° C

**Storage Temp:** -65° to +85° C

**Altitude:** 60,000 feet

**Relative Humidity:** 5 to 95%, condensing

**Vibration:** MIL-STD-810 Method 514.5

**Shock:** MIL-STD-810 Method 516.5

**EMI/EMC:** MIL-STD-461 - CE101, CE102, CS101, RE101, RE102, RS101

**Sand and Dust:** MIL-STD-810 Method 510 ▶

**Options**

**Sample Clock Options**

- Option -910** User-Programmable Sample Clock
- Option -911** 1.5 / 3.0 GHz sample clock
- Option -912** 1.6 / 3.2 GHz sample clock
- Option -913** 1.2 / 2.4 GHz sample clock
- Option -914** 1.36 / 2.72 GHz sample clock
- Option -915** 1.8 / 3.6 GHz sample clock

**Note** Custom fixed-frequency sample clocks available upon request.

**Option -910 User-Programmable Sample Clock**

- Dual-channel mode sample clock range: 150 MHz – 945 MHz  
970 MHz – 1134 MHz  
1213 MHz – 1417.5 MHz
- Single-channel mode sample clock range: 500 MHz – 1890 MHz  
1940 MHz – 2268 MHz  
2426 MHz – 2835 MHz

**Storage Options**

- Option -410** 3.84 TB SSD Storage
- Option -415** 7.68 TB SSD Storage
- Option -420** 15.36 TB SSD Storage
- Option -430** 30.72 TB SSD Storage

**RAID Configurations**

- Standard** RAID Level 0
- Option -285** RAID Level 5
- Option -286** RAID Level 6

**Additional Options**

- Option -261** GPS Time and Position Stamping
- Standard** 8 GB DDR System Memory
- Option -309** 16 GB DDR System Memory
- Option -310** 32 GB DDR System Memory

*Specifications are subject to change without notice*