


15" Intel® Core™ i3 / i5 / i7 Mobile Industrial Panel PC



Features

- 15" TFT SXGA (1024x768) LCD
- Intel® Core™ i3 / i5 / i7 Mobile processor
- Anti-Vibration Disk Drive Bay For HDD or SSD
- IP-65 Certified Anti-Scratch & Waterpro of Front Panel (Stainless Steel optional)
- Resistive, Capacitive, Infrared Touchscreen (optional)
- 2x RJ45 LAN, 3x RS232, 1x RS232/422/485 ports

Specifications

System		SD-1537
Processor	Intel Core™ i3 / i5 / i7 Mobile processor, Package Type: Socket G2 rPGA988B	
Memory	2 x DDR3 1066/1333/1600 SO-DIMM up to 16 GB dual channel.	
Chipset	Mobile Intel® QM67 PCH (Platform Controller Hub)	
Ethernet	2x Intel 82574L Gigabit LAN, Wake-on-LAN, PXE ready	
I/O Port	Rear side : 2x RJ45 LAN, 4x USB 2.0, 4x Serial : 3x RS232(COM1/3/4), 1x RS485/422/232(COM2), VGA, DVI, DC-in , Line out / line in / microphone Left side : SD/MS HG/MMC, 1x USB 2.0 (on card reader)	
Storage Disk Drive	Anti-Vibration 2.5" SATA Hard Disk Drive or SSD (Optional) CFast card Socket Slim DVD Multi RW (Optional) Card Reader x1 with USB2.0 x1 (SD/MS HG/MMC, on side chassis)	
Expansion Slot	1x Mini PCI-E slot, 1x CFAST socket, 1x SIM socket	
OS Support	Windows XP® Pro, Windows 7® for Embedded Systems	
Watch Dog	Can be set by 500ms, 1, 2, 4 seconds period. RESET or NMI was generated	
Power Lost Recovery	Support AT mode boot up	
Mechanical		
Construction	Heavy-duty steel chassis, (or optional stainless steel front panel) IP-65 certified anti-scratch steel front panel	
Mounting	Panelmount, Wallmount, Stand	
Dimension	17.4" (W) x 14.7" (H) x 3.8" (D) / (441.6mm x 374mm x 96.1mm)	
Net Weight	23.15 lb (10.5 Kg)	
Environmental		
Operating Temperature	32°F ~ 122°F(0°C ~ 50°C)	
Storage Temperature	-4°F ~ 140°F(-20°C ~ 60°C)	
Storage Humidity	10% to 90%@ 35°C, non-condensing	
Vibration	Random operation 1.0G, 5~500Hz	
Shock	10G peak acceleration (11 msec. Duration)	
Power Adapter		
AC input	100~240V (50/60Hz) 2.5A	
DC output	20V, 7.5A 150W	
Optional		
Touchscreen	Resistive, Capacitive, Infrared.	
Wireless LAN	802.11 b/g/n	

Note : All Specifications are subject to change without notice.

17" Intel® Core™ i3 / i5 / i7 Mobile Industrial Panel PC



Features

- 17" TFT SXGA (1280x1024) LCD
- Intel® Core™ i3 / i5 / i7 Mobile processor
- Anti-Vibration Disk Drive Bay For HDD or SSD
- IP-65 Certified Anti-Scratch & Waterproof Front Panel (Stainless Steel optional)
- Resistive, Capacitive, Infrared Touchscreen (optional)
- 2x RJ45 LAN, 3x RS232, 1x RS232/422/485 ports

Specifications

System		SD-1737
Processor	Intel Core™ i3 / i5 / i7 Mobile processor, Package Type: Socket G2 rPGA988B	
Memory	2 x DDR3 1066/1333/1600 SO-DIMM up to 16 GB dual channel.	
Chipset	Mobile Intel® QM67 PCH (Platform Controller Hub)	
Ethernet	2x Intel 82574L Gigabit LAN, Wake-on-LAN, PXE ready	
I/O Port	Rear side : 2x RJ45 LAN, 4x USB 2.0, 4x Serial : 3x RS232(COM1/3/4), 1x RS485/422/232(COM2), VGA, DVI, DC-in , Line out / line in / microphone Left side : SD/MS HG/MMC, 1x USB 2.0 (on card reader)	
Storage Disk Drive	Anti-Vibration 2.5" SATA Hard Disk Drive or SSD (Optional) CFast card Socket Slim DVD Multi RW (Optional) Card Reader x1 with USB2.0 x1 (SD/MS HG/MMC, on side chassis)	
Expansion Slot	1x Mini PCI-E slot, 1x CFAST socket, 1x SIM socket	
OS Support	Windows XP® Pro, Windows 7® for Embedded Systems	
Watch Dog	Can be set by 500ms, 1, 2, 4 seconds period. RESET or NMI was generated	
Power Lost Recovery	Support AT mode boot up	
Mechanical		
Construction	Heavy-duty steel chassis, (or optional stainless steel front panel) IP-65 certified anti-scratch steel front panel	
Mounting	Panelmount, Wallmount, Stand	
Dimension	17.4" (W) x 14.7" (H) x 3.8" (D) / (441.6mm x 374mm x 98.5mm)	
Net Weight	23.81 lb (10.8 Kg)	
Environmental		
Operating Temperature	32°F ~ 122°F(0°C ~ 50°C)	
Storage Temperature	-4°F ~ 140°F(-20°C ~ 60°C)	
Storage Humidity	10% to 90%@ 35°C, non-condensing	
Vibration	Random operation 1.0G, 5~500Hz	
Shock	10G peak acceleration (11 msec. Duration)	
Power Adapter		
AC input	100~240V (50 / 60Hz) 2.5A	
DC output	20V, 7.5A 150W	
Optional		
Touchscreen	Resistive, Capacitive, Infrared.	
Wireless LAN	802.11 b/g/n	

Note : All Specifications are subject to change without notice.

19" Intel® Core™ i3 / i5 / i7 Mobile Industrial Panel PC




Features

- 19" TFT SXGA (1280x1024) LCD
- Intel® Core™ i3 / i5 / i7 Mobile processor
- Anti-Vibration Disk Drive Bay For HDD or SSD
- IP-65 Certified Anti-Scratch & Waterpro of Front Panel (Stainless Steel optional)
- Resistive, Capacitive, Infrared Touchscreen (optional)
- 2x RJ45 LAN, 3x RS232, 1x RS232/422/485 ports

Specifications

System		SD-1937
Processor	Intel Core™ i3 / i5 / i7 Mobile processor, Package Type: Socket G2 rPGA988B	
Memory	2 x DDR3 1066/1333/1600 SO-DIMM up to 16 GB dual channel.	
Chipset	Mobile Intel® QM67 PCH (Platform Controller Hub)	
Ethernet	2x Intel 82574L Gigabit LAN, Wake-on-LAN, PXE ready	
I/O Port	Rear side : 2x RJ45 LAN, 4x USB 2.0, 4x Serial : 3x RS232(COM1/3/4), 1x RS485/422/232(COM2), VGA, DVI, DC-in , Line out / line in / microphone. Left side : SD/MS HG/MMC, 1x USB 2.0 (on card reader)	
Storage Disk Drive	Anti-Vibration 2.5" SATA Hard Disk Drive or SSD (Optional) CFast card Socket Slim DVD Multi RW (Optional) Card Reader x1 with USB2.0 x1 (SD/MS HG/MMC, on side chassis)	
Expansion Slot	1x Mini PCI-E slot, 1x CFAST socket, 1x SIM socket	
OS Support	Windows XP® Pro, Windows 7® for Embedded Systems	
Watch Dog	Can be set by 500ms, 1, 2, 4 seconds period. RESET or NMI was generated	
Power Lost Recovery	Support AT mode boot up	
Mechanical		
Construction	Heavy-duty steel chassis, (or optional stainless steel front panel) IP-65 certified anti-scratch steel front panel	
Mounting	Panelmount, Wallmount, Stand	
Dimension	19" (W) x 16" (H) x 3.6" (D) / (482mm x 406mm x 91mm)	
Net Weight	26 lb (11.8 Kg)	
Environmental		
Operating Temperature	32°F ~ 122°F(0°C ~ 50°C)	
Storage Temperature	-4°F ~ 140°F(-20°C ~ 60°C)	
Storage Humidity	10% to 90%@ 35°C, non-condensing	
Vibration	Random operation 1.0G, 5~500Hz	
Shock	10G peak acceleration (11 msec. Duration)	
Power Adapter		
AC input	100~240V (50 / 60Hz) 2.5A	
DC output	20V, 7.5A 150W	
Optional		
Touchscreen	Resistive, Capacitive, Infrared.	
Wireless LAN	802.11 b/g/n	

Note : All Specifications are subject to change without notice.

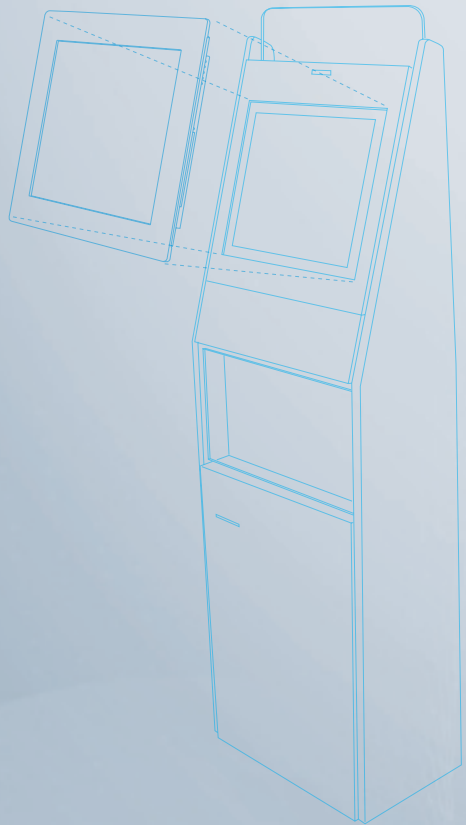

SDK Embedded Systems Ltd.

Tel: +972-722-122-017

Fax: +972-722-509-126

Email: sales@sdksys.com

<http://www.sdksys.com>

INDUSTRIAL PANEL PC

